

Window Minimal M 306

code WI111.930/01




PRODUCT DESCRIPTION


Recessed recessed luminaire flush with wall or ceiling for indoor diffuse lighting. Installation for plasterboard or concrete. Professional LED modules 12.4 W 3000°K. Remote control gear to be integrated. Colour white. Degree of protection IP20.

PRODUCT SPECS

Installation method	Trimless recessed, Wall surface mounted
Light source	LED
Absorbed power	12,4 W
Color temperature	3000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	770 lm
Luminous efficiency	62 lm/W
MacAdam color tolerance	3
Life time estimate	50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	E
Dimension	L200xW85xH480 mm
Hole size	282X200 mm
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

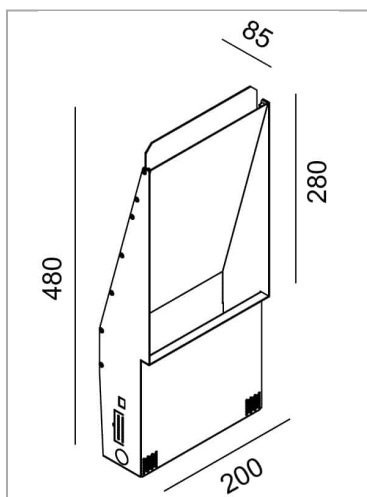

WINDOW LED

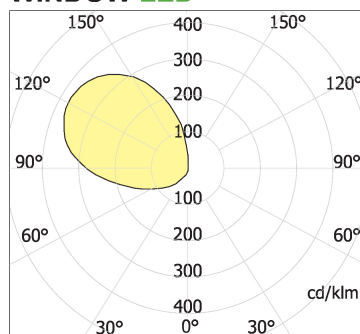

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

AE350.16C (Copia)



code AE350.15C

Electronic power supply current