

Ci 35 Swivel

code LT1163.930F/01





PRODUCT DESCRIPTION

Round recessed spotlight. Wall/ceiling appliance.
Adjustable optic

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	5 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Flood 22°
Finishing	White
Luminous flux of the product	619 lm
Luminous efficiency	124 lm/W
MacAdam color tolerance	2
Life time estimate	50000h L90 B10 ta 25°C
Energy efficiency class	D
Weight	0.12 Kg
Dimension	H70 Ø64 mm
Hole size	Ø 56 mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

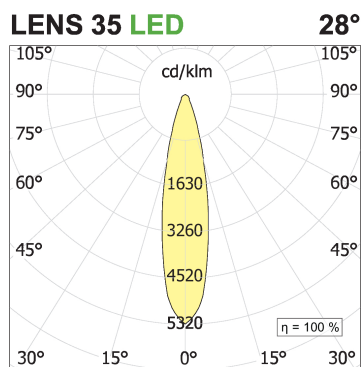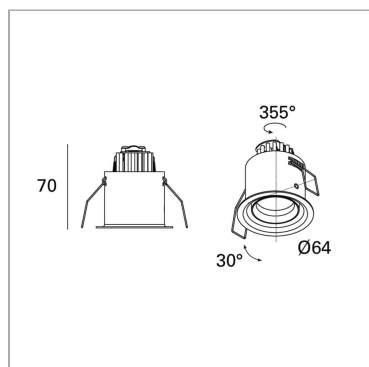

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Accessori Wallbox Wallbox CI35 e CI35/35F



code LT9061

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit the article CI35 and CI35F

Technical Sheet

