
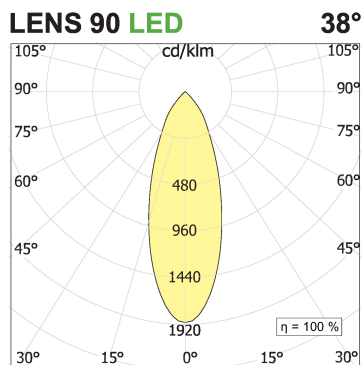
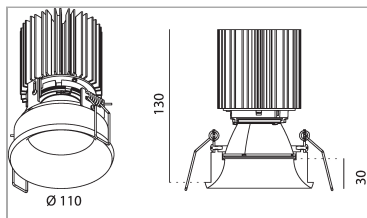


Nyx Frame Fixed TF80F for plasterboard

code NF040.9TWW/01

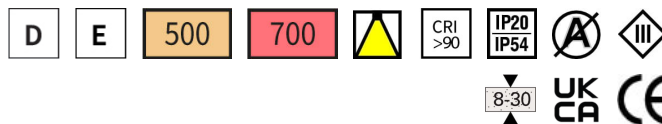

PRODUCT DESCRIPTION

Round or square, fix or directional, trimless recessed downlight for ceiling installation, for accent or diffused lighting. Light source in recessed position for anti-glare lighting. Available both in plasterboard false-ceiling and in concrete/brick wall installation version. For integrated LED source or for 12V/230V QR-CB 35, QR-CB 51 and QR-LP 111 or 230V QPAR16 GU10 halogen/led lamps. Body and optical group in painted aluminum. Version with Integrated Chip On Board LED source provided with 99,99% pure aluminum coated reflector. Directional versions: optical group adjustable 355° horizontally and +/- 20° vertically. Remote power-supply available as an accessory. Degree of protection IP20/IP23/IP54.

PRODUCT SPECS

| | |
|---------------------------|------------------------------|
| Installation method | Recessed with frame |
| Light source | LED |
| Absorbed power | 17 W / 24,3 W |
| Color temperature | Tunable White |
| Color rendering index CRI | >90 |
| Optic | Wide 15° |
| Finishing | White |
| MacAdam color tolerance | 3 |
| Life time estimate | 3SDCM 50000h L90 B10 ta 25°C |
| Energy efficiency class | D / E |
| Weight | 0.85 Kg |
| Dimension | H130 Ø110 mm |
| Hole size | 104 mm |
| IP Grade | IP20/54 |
| Protection Class | Class III appliance |
| Product Spec | Circular shape |
| Power supply/Transformer | Not included |
| Protocol | See power supply |

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

AE500.20C1



code AE500.20C1

Electronic power supply current

AE700.32C1.MP (Copia)



code AE700.30C.MP


Electronic power supply current

Technical Sheet



OPTIONAL ACCESSORIES

Accessori Lens ø 74 Satin lens Ø 74




code L074S

uncategorized

Technical Sheet



Accessori Lens ø 74 Elissoidal lens Ø 74




code L074E

uncategorized

Technical Sheet



Accessori Lens ø 74 Asymmetric lens Ø 74



code L074A

uncategorized


Technical Sheet



Accessori Lens ø 74 Honey comb louver Ø 74

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 2 / 4



code L074R

uncategorized

Technical Sheet



