
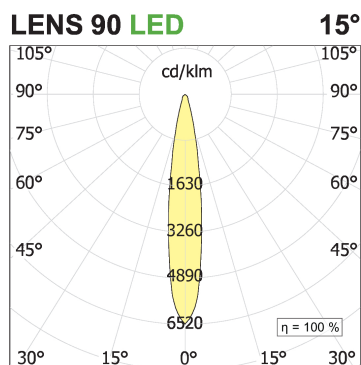
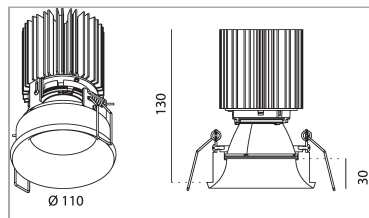


## Nyx Frame Fixed TF80F for plasterboard

code NF040.940S/01

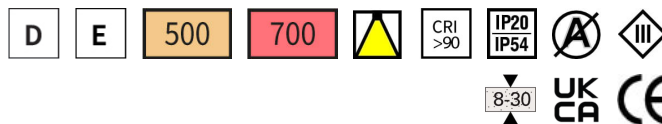

## PRODUCT DESCRIPTION

Round or square, fix or directional, trimless recessed downlight for ceiling installation, for accentor diffused lighting. Light source in recessed position for anti-glare lighting. Available both in plasterboard false-ceiling and in concrete/brick wall installation version. For integrated LED source or for 12V/230V QR-CB 35, QR-CB 51 and QR-LP 111 or 230V QPAR16 GU10 halogen/led lamps. Body and optical group in painted aluminum. Version with Integrated Chip On Board LED source provided with 99,99% pure aluminum coated reflector. Directional versions: optical group adjustable 355° horizontally and +/- 20° vertically. Remote power-supply available as an accessory. Degree of protection IP20/IP23/IP54.

## PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	17 W / 24,3 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Spot 15°
Finishing	White
Luminous flux of the product	1816 lm / 2595 lm
Luminous efficiency	107 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 ta 25°C
Energy efficiency class	D / E
Weight	0.85 Kg
Dimension	H130 Ø110 mm
Hole size	104 mm
IP Grade	IP20/54
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

**WEB PAGE**



## ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances  $\pm 10\%$ . The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 4

## MANDATORY ACCESSORIES

### AE500.20C1



code AE500.20C1

Electronic power supply current

### AE700.32C1.MP (Copia)



code AE700.30C.MP


Electronic power supply current

Technical Sheet



## OPTIONAL ACCESSORIES

### Accessori Lens ø 74 Satin lens Ø 74




code L074S

uncategorized

Technical Sheet



### Accessori Lens ø 74 Elissoidal lens Ø 74




code L074E

uncategorized

Technical Sheet



### Accessori Lens ø 74 Asymmetric lens Ø 74



code L074A

uncategorized


Technical Sheet



### Accessori Lens ø 74 Honey comb louver Ø 74

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.  
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.  
We reserve the right to make changes to our products at any time.

Page 2 / 4



code L074R

uncategorized

Technical Sheet



