
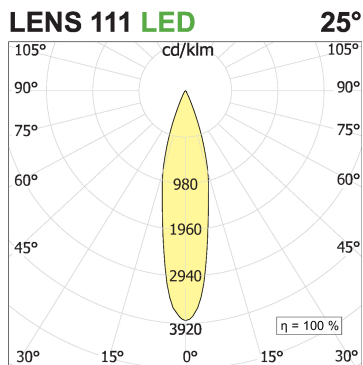


Nyx Frame Fixed TF111F for plasterboard

code NF060.935F/01

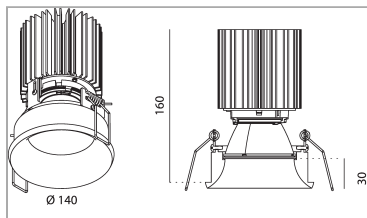

PRODUCT DESCRIPTION

Round or square, fix or directional, trimless recessed downlight for ceiling installation, for accent or diffused lighting. Light source in recessed position for anti-glare lighting. Available both in plasterboard false-ceiling and in concrete/brick wall installation version. For integrated LED source or for 12V/230V QR-CB 35, QR-CB 51 and QR-LP 111 or 230V QPAR16 GU10 halogen/led lamps. Body and optical group in painted aluminum. Version with Integrated Chip On Board LED source provided with 99,99% pure aluminum coated reflector. Directional versions: optical group adjustable 355° horizontally and +/- 20° vertically. Remote power-supply available as an accessory. Degree of protection IP20/IP23/IP54.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	24,3 W / 32 W
Color temperature	3500K
Color rendering index CRI	>90
Optic	Flood 25°
Finishing	White
Luminous flux of the product	2742 lm / 3551 lm
Luminous efficiency	113 lm/W / 111 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 ta 25°C
Energy efficiency class	E
Weight	1.4 Kg
Dimension	H160 Ø140 mm
Hole size	134 mm
IP Grade	IP20/54
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Accessori Lens Ø 111 Satin lens Ø 111



code L111S

uncategorized

Technical Sheet



Accessori Lens Ø 111 Elissoidal lens Ø 111



code L111E

uncategorized

Technical Sheet



Accessori Lens Ø 111 Asymmetric lens Ø 111



code L111A

uncategorized

Technical Sheet



Accessori Lens Ø 111 Honey cmb louver Ø 111



code L111R

uncategorized

Technical Sheet

