

## Ipipedi Wall R120A2 double emission

code PP332.930FD/01





### PRODUCT DESCRIPTION

indoor and outdoor wall lighting fixture characterized by aluminium tubular section. Bi-emission version.

### PRODUCT SPECS

Installation method	Wall surface mounted
Light source	Led-en
Absorbed power	2x24,3 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Flood 24°
Finishing	Bianco
Luminaire luminous flux	4712 lm
Luminous efficiency	97 lm/W
MacAdam color tolerance	3
Durata media stimata	3SDCM 50000h L90 B10 ta 25°C
Power supply/transformer	Included
Protocol	Dimmable
Energy efficiency class	E
Dimension	H380 Ø120 mm
IP Grade	IP20

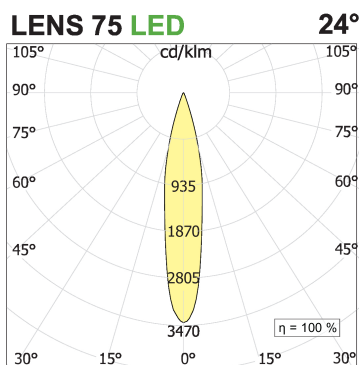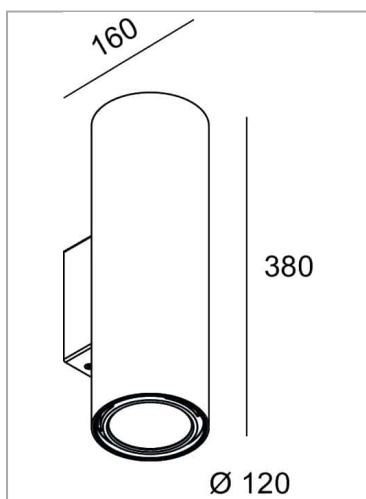

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## OPTIONAL ACCESSORIES

### Accessori Lens With Ring Satin lens with rings ø115



code L115S.A

uncategorized. White finishing

Technical Sheet



code L115S.A

uncategorized. Black finishing

Technical Sheet



### Accessori Lens With Ring Asymmetric lens with ring ø115



code L115A.A

uncategorized. White finishing

Technical Sheet



code L115A.A

uncategorized. Black finishing

Technical Sheet



### Accessori Lens With Ring Elipsoid lens with ring ø115



code L115E.A

uncategorized. White finishing

Technical Sheet



code L115E.A

uncategorized. Black finishing

Technical Sheet



### Accessori Lens With Ring Honeycomb louver with ring ø115



code L115R.A

uncategorized. White finishing

Technical Sheet





code L115R.A

uncategorized. Black finishing

Technical Sheet

