

Ipipedi Wall R120A2 double emission

code PP332.930WD/01





PRODUCT DESCRIPTION

indoor and outdoor wall lighting fixture characterized by aluminium tubular section. Bi-emission version.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	Led-en
Absorbed power	2x24,3 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Wide 38°
Finishing	Bianco
Luminaire luminous flux	4860 lm
Luminous efficiency	100 lm/W
MacAdam color tolerance	3
Durata media stimata	3SDCM 50000h L90 B10 ta 25°C
Power supply/transformer	Included
Protocol	Dimmable
Energy efficiency class	E
Dimension	H380 Ø120 mm
IP Grade	IP20

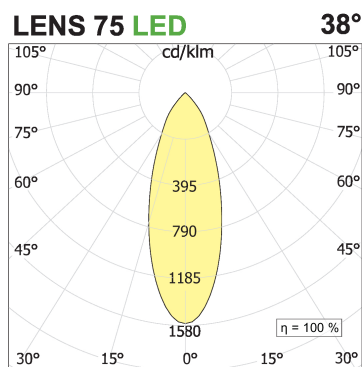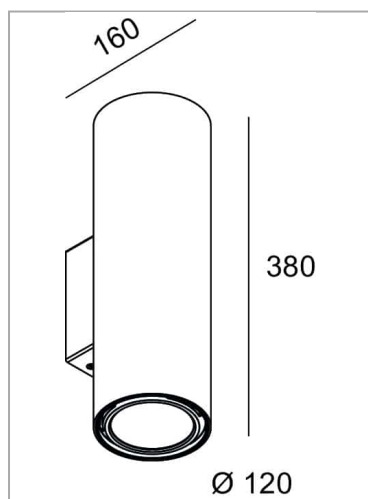

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances $\pm 10\%$. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 3

OPTIONAL ACCESSORIES

Accessori Lens With Ring Satin lens with rings ø115



code L115S.A

uncategorized. White finishing

Technical Sheet



code L115S.A

uncategorized. Black finishing

Technical Sheet



Accessori Lens With Ring Asymmetric lens with ring ø115



code L115A.A

uncategorized. White finishing

Technical Sheet



code L115A.A

uncategorized. Black finishing

Technical Sheet



Accessori Lens With Ring Elipsoid lens with ring ø115



code L115E.A

uncategorized. White finishing

Technical Sheet



code L115E.A

uncategorized. Black finishing

Technical Sheet



Accessori Lens With Ring Honeycomb louver with ring ø115



code L115R.A

uncategorized. White finishing

Technical Sheet





code L115R.A

uncategorized. Black finishing

Technical Sheet

