

## Manine spot 90-V monovertical emission

code LT7102.840S/01





### PRODUCT DESCRIPTION

Indoor corner luminaire, single-emission for accent lighting. Complete optical assembly with professional LED sources 3 W, complete with ballast. 90° internal corner version with 120x120 mm metal body, 30 mm wall projection white. Degree of protection IP54.

### PRODUCT SPECS

|                              |                        |
|------------------------------|------------------------|
| Installation method          | Wall surface mounted   |
| Light source                 | LED                    |
| Absorbed power               | 2x1,5 W                |
| Color temperature            | 4000K                  |
| Color rendering index CRI    | 80                     |
| Optic                        | Spot 14°               |
| Finishing                    | White                  |
| Luminous flux of the product | 198 lm                 |
| Luminous efficiency          | 66 lm/W                |
| MacAdam color tolerance      | 3                      |
| Life time estimate           | 50000h L80 B10 ta 25°C |
| Energy efficiency class      | D                      |
| Weight                       | 0.78 Kg                |
| Dimension                    | L120xH120 mm           |
| IP Grade                     | IP40                   |
| Power supply                 | 220-240V 50-60Hz       |

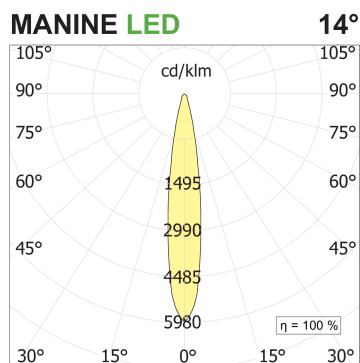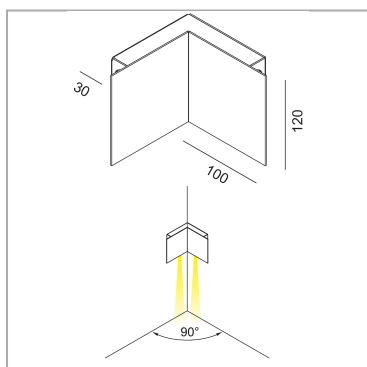

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

