

Manine spot 270-V vertical double emission

code LT7004.830S/01





PRODUCT DESCRIPTION

Indoor luminaire for outdoor corner, bi-emission for diffuse lighting. Complete optical assembly with professional LED sources 6 W, complete with ballast. 270° outdoor corner version with 120x120 mm metal body, 30 mm wall projection [finiture]. Degree of protection IP54.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	4x1,5 W
Color temperature	3000K
Color rendering index CRI	80
Optic	Spot 14°
Finishing	White
Luminous flux of the product	368 lm
Luminous efficiency	61 lm/W
MacAdam color tolerance	3
Life time estimate	50000h L80 B10 ta 25°C
Energy efficiency class	D
Weight	0.82 Kg
Dimension	L120xH120 mm
IP Grade	IP40
Power supply	220-240V 50-60Hz

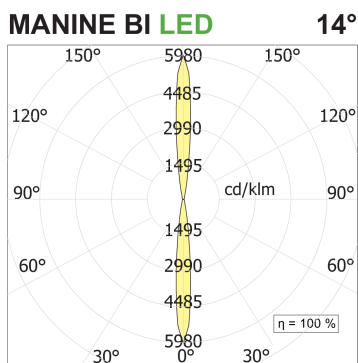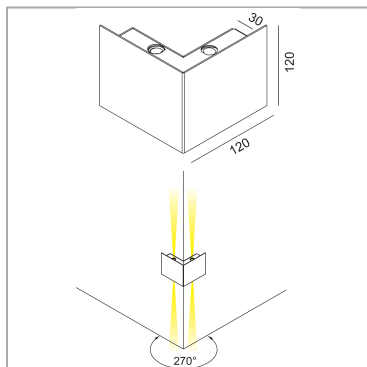

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1