

Manine spot 270-V vertical double emission

code LT7004.840S/01





PRODUCT DESCRIPTION

Indoor luminaire for outdoor corner, bi-emission for diffuse lighting. Complete optical assembly with professional LED sources 6 W, complete with ballast. 270° outdoor corner version with 120x120 mm metal body, 30 mm wall projection [finiture]. Degree of protection IP54.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	4x1,5 W
Color temperature	4000K
Color rendering index CRI	80
Optic	Spot 14°
Finishing	White
Luminous flux of the product	395 lm
Luminous efficiency	66 lm/W
MacAdam color tolerance	3
Life time estimate	50000h L80 B10 ta 25°C
Energy efficiency class	D
Weight	0.82 Kg
Dimension	L120xH120 mm
IP Grade	IP40
Power supply	220-240V 50-60Hz

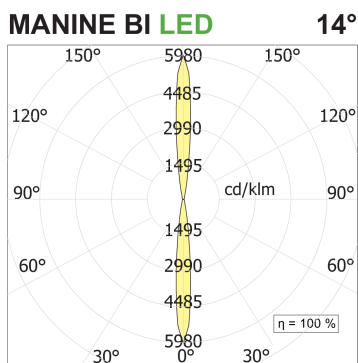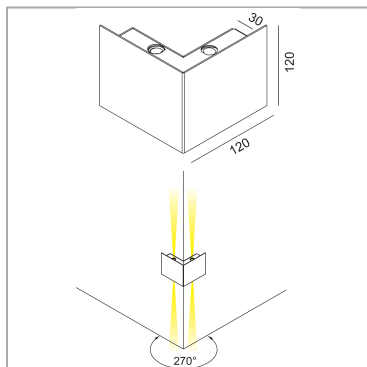

WEB PAGE



ASSEMBLY INSTRUCTIONS

