
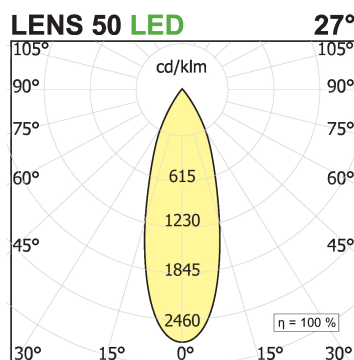
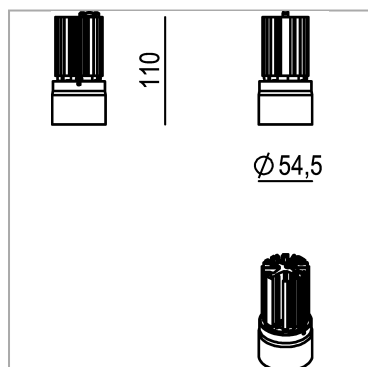


## Nyx Frame TF50D Directional for plasterboard

code NF033.9TWF/01

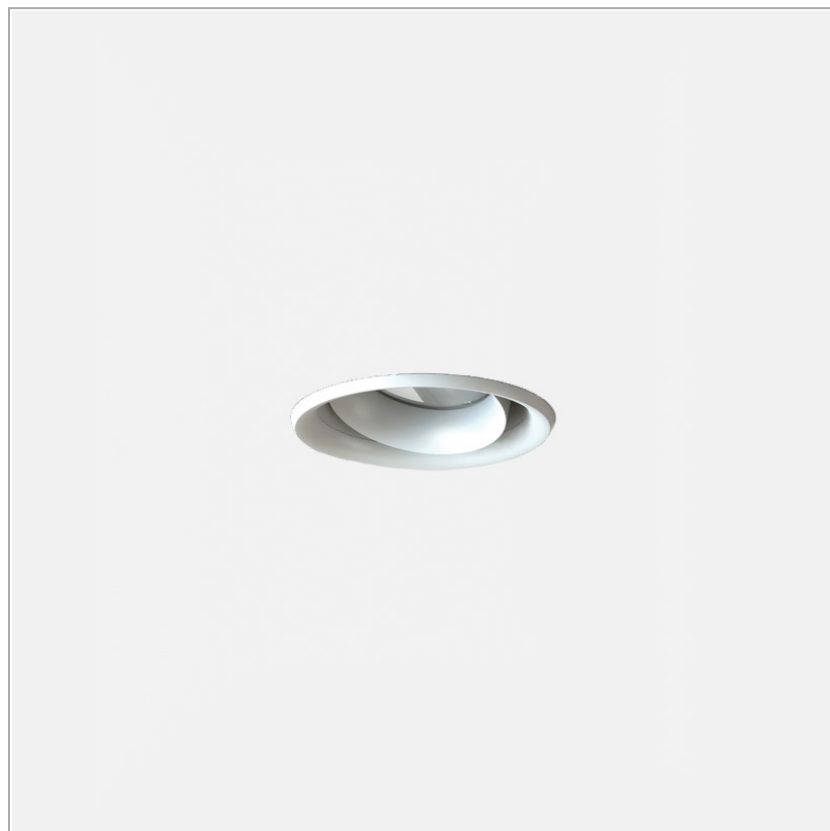

### PRODUCT DESCRIPTION

Round or square, fix or directional, trimless recessed downlight for ceiling installation, for accentor diffused lighting. Light source in recessed position for anti-glare lighting. Available both in plasterboard false-ceiling and in concrete/brick wall installation version. For integrated LED source or for 12V/230V QR-CB 35, QR-CB 51 and QR-LP 111 or 230V QPAR16 GU10 halogen/led lamps. Body and optical group in painted aluminum. Version with Integrated Chip On Board LED source provided with 99,99% pure aluminum coated reflector. Directional versions: optical group adjustable 355° horizontally and +/- 20° vertically. Remote power-supply available as an accessory. Degree of protection IP20/IP23/IP54.

### PRODUCT SPECS

|                           |                             |
|---------------------------|-----------------------------|
| Installation method       | Recessed with frame         |
| Light source              | LED                         |
| Absorbed power            | 12 W / 18 W                 |
| Color temperature         | Tunable White               |
| Color rendering index CRI | >90                         |
| Optic                     | Flood 27°                   |
| Finishing                 | White                       |
| MacAdam color tolerance   | 2                           |
| Life time estimate        | 2SCDM 50.000h L90 B10 ta25° |
| Energy efficiency class   | D                           |
| Weight                    | 0.35 Kg                     |
| Dimension                 | H110 Ø54.5 mm               |
| Hole size                 | 85 mm                       |
| IP Grade                  | IP20/54                     |
| Protection Class          | Class III appliance         |
| Product Spec              | Circular shape              |
| Power supply/Transformer  | Not included                |
| Protocol                  | See power supply            |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

## MANDATORY ACCESSORIES

### AE350.16C (Copia)




code AE350.15C

Electronic power supply current

## OPTIONAL ACCESSORIES

### Accessori Lens ø 50 Elissoidal lens Ø 50



code L050E


uncategorized

Warning: Not suitable with halogen lamp

Technical Sheet



### Accessori Lens ø 50 Asymmetric lens Ø 50



code L050A


uncategorized

Warning: Not suitable with halogen lamp

Technical Sheet



### Accessori Lens ø 50 Honey comb Ø 50



code L050R

uncategorized

Technical Sheet

