


Nyx Trimless Directional T50D - optic group

code LTN69K.927F/01


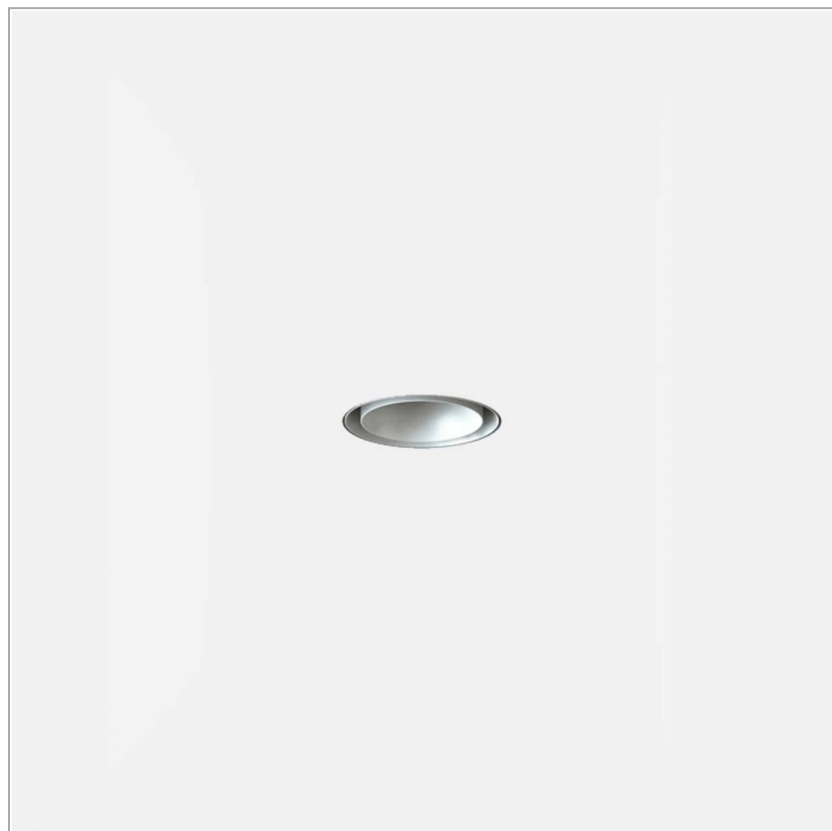


PRODUCT DESCRIPTION

Wall/ceiling recessed lamp, round section, direct light.
Possibility to install total recessed or semi-recessed

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	8 W / 12 W
Color temperature	2700K
Color rendering index CRI	90 / >90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	790 lm / 1325 lm
Luminous efficiency	99 lm/W / 110 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Dimension	H96 Ø70 mm
Hole size	Ø 90 mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Adjustable, Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

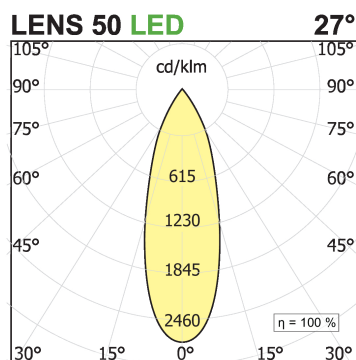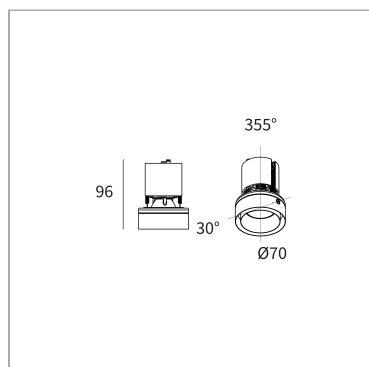

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 1 / 2

MANDATORY ACCESSORIES

Outer Casing Nyx T50D trimless for plasterbord




code LTN05A

Trimless recessed indoor wallbox for false ceiling

Technical Sheet



Accessori Wallbox Nyx For Brickwall T50D outer casing box for brick wall

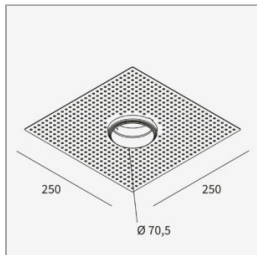

code LTN05B

Trimless recessed indoor outer casing for brick wall square shape

Technical Sheet



AE350.16C (Copia)



code AE350.15C

Electronic power supply current

AE500.20C1



code AE500.20C1

Electronic power supply current