

**Nyx Trimless Directional T50D - optic group**

code LTN60K.927F/01





**PRODUCT DESCRIPTION**

Wall/ceiling recessed lamp, round section, direct light. Possibility to install total recessed or semi-recessed

**PRODUCT SPECS**

Installation method	Trimless recessed
Light source	LED
Absorbed power	12 W / 18 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	1325 lm / 2268 lm
Luminous efficiency	110 lm/W / 126 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Weight	0.38 Kg
Dimension	H114 Ø70 mm
Hole size	Ø 90 mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Adjustable, Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

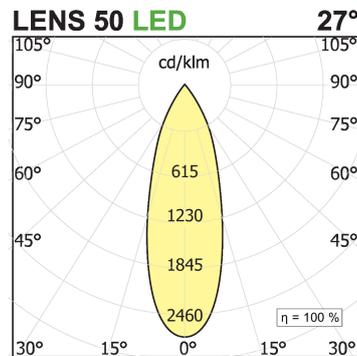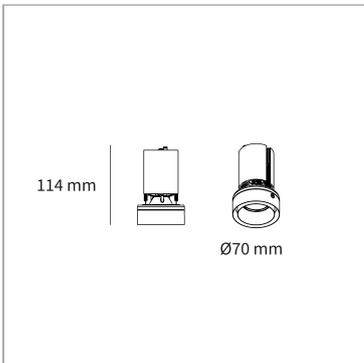

**WEB PAGE**



**ASSEMBLY INSTRUCTIONS**



## MANDATORY ACCESSORIES

### Outer Casing Nyx T50D trimless for plasterbord




code LTN05A

Trimless recessed indoor wallbox for false ceiling

Technical Sheet



### Accessori Wallbox Nyx For Brickwall T50D outer casing box for brick wall



code LTN05B

Trimless recessed indoor outer casing for brick wall square shape

Technical Sheet



### AE350.16C (Copia)



code AE350.15C

Electronic power supply current

### AE500.20C1



code AE500.20C1

Electronic power supply current