

## Nyx Trimless fixed T111F - optic group

code LTN70K.940S/01





### PRODUCT DESCRIPTION

Wall/ceiling recessed lamp, round section, direct light. Possibility to install total recessed or semi-recessed.

### PRODUCT SPECS

|                              |                              |
|------------------------------|------------------------------|
| Installation method          | Trimless recessed            |
| Light source                 | LED                          |
| Absorbed power               | 24,3 W / 32 W                |
| Color temperature            | 4000K                        |
| Color rendering index CRI    | >90                          |
| Optic                        | Spot 16°                     |
| Finishing                    | White                        |
| Luminous flux of the product | 2595 lm / 3545 lm            |
| Luminous efficiency          | 107 lm/W / 111 lm/W          |
| MacAdam color tolerance      | 3                            |
| Life time estimate           | 3SDCM 50000h L90 B10 ta 25°C |
| Energy efficiency class      | E                            |
| Weight                       | 1.43 Kg                      |
| Dimension                    | H168 Ø120 mm                 |
| Hole size                    | Ø 135 mm                     |
| IP Grade                     | IP20/54                      |
| Protection Class             | Class III appliance          |
| Product Spec                 | Circular shape               |
| Power supply/Transformer     | Not included                 |
| Protocol                     | See power supply             |

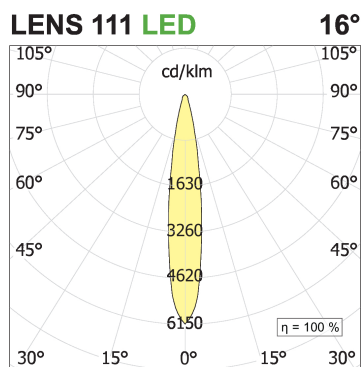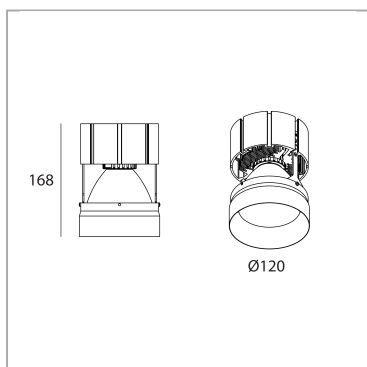

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.


Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 3

## MANDATORY ACCESSORIES

### Accessori Outer Casing Nyx T For False Ceiling T111F outer casing for platerboard

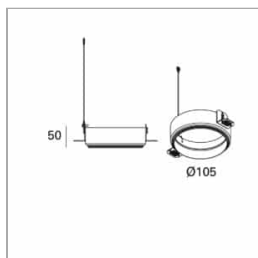


code LTN07A

Trimless recessed uncategorized outer casing for plasterboard

Technical Sheet



### Accessori Wallbox Nyx For Brickwall T111F outer casing box for brick wall

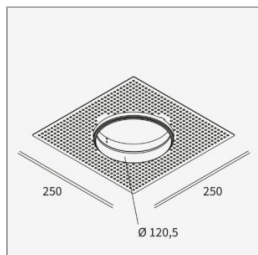

code LTN07B


Trimless recessed indoor outer casing for brick wall square shape

Technical Sheet



## OPTIONAL ACCESSORIES

### Accessori Lens ø 111 Satin lens Ø 111




code L111S

uncategorized

Technical Sheet



### Accessori Lens ø 111 Elissoidal lens Ø 111




code L111E

uncategorized

Technical Sheet



### Accessori Lens ø 111 Asymmetric lens Ø 111



code L111A

uncategorized


Technical Sheet



### Accessori Lens ø 111 Honey cmb louver Ø 111

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.  
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.  
We reserve the right to make changes to our products at any time.

Page 2 / 3



code L111R

uncategorized

Technical Sheet

