

Nyx Trimless Directional T Kit T111D

code LTN80K.940S/01





PRODUCT DESCRIPTION

Wall/ceiling recessed lamp, round section, direct light.
Possibility to install total recessed or semi-recessed.

PRODUCT SPECS

Installation method	Trimless recessed
Light source	Led
Absorbed power	24,3 W or 32 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Spot 16°
Finishing	White
Luminaire luminous flux	2250 lm or 4662 lm
Luminous efficiency	93 lm/W or 146 lm/W
MacAdam color tolerance	3
Durata media stimata	3SDCM 50000h L90 B10 ta 25°C
Power supply/transformer	Not included
Energy efficiency class	E
Weight	0.9 Kg
Dimension	H156 Ø140 mm
Hole size	round cut Ø 150 mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Adjustable, Circular shape
gruppi alimentatori	Corrente LED 900mA

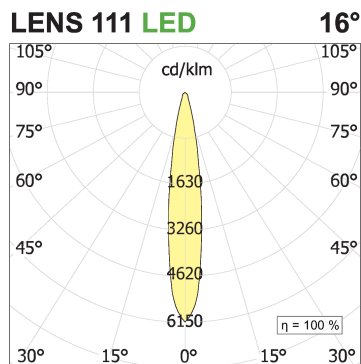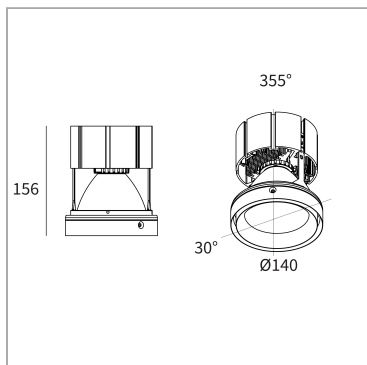

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

Outer Casing Nyx T111D trimless for false ceiling




code LTN09A

Trimless recessed indoor wallbox for false ceiling

Technical Sheet



Accessori Wallbox Nyx For Brickwall T111D outer casing box for brick wall

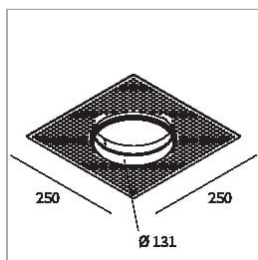

code LTN09B


Trimless recessed uncategorized outer casing for brick wall square shape

Technical Sheet



OPTIONAL ACCESSORIES

Accessori Lens ø 111 Satin lens Ø 111




code L111S

uncategorized

Technical Sheet



Accessori Lens ø 111 Elissoidal lens Ø 111




code L111E

uncategorized

Technical Sheet



Accessori Lens ø 111 Asymmetric lens Ø 111




code L111A

uncategorized

Technical Sheet



Accessori Lens ø 111 Honey cmb louver Ø 111



code L111R

uncategorized

Technical Sheet

