

Nyx Trimless fixed T50F - optic group

code LTN89K.927F/01





PRODUCT DESCRIPTION

Wall/ceiling recessed lamp, round section, direct light.
Possibility to install total recessed or semi-recessed

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	8 W / 12 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	1008 lm / 1261 lm
Luminous efficiency	126 lm/W / 105 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Dimension	H90 Ø55 mm
Hole size	Ø 75 mm
IP Grade	IP20/54
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

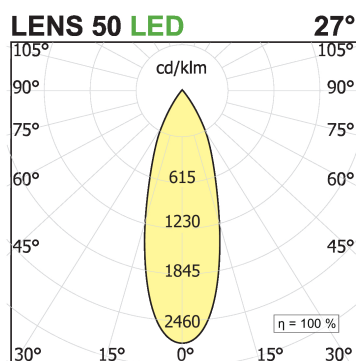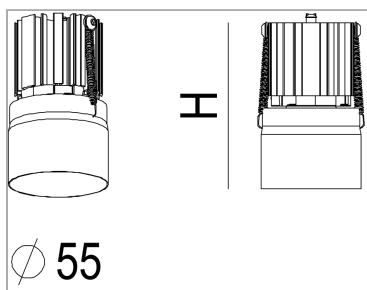

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

Outer Casing Nyx T50 and T35D trimless for false ceiling

Formwork for fixing Nyx T50F and Nyx T35D to plasterboard.



code LTN04A

Formwork for fixing Nyx T50F and Nyx T35D to plasterboard.

Technical Sheet



Frame Nyx For Brickwall T35D e T50F outer casing box for brick wall

Frame for brick wall for Nyx T35D e T50F.



code LTN04B

Frame for brick wall for Nyx T35D e T50F.

Technical Sheet



AE350.16C (Copia)



code AE350.15C

Electronic power supply current

AE500.20C1



code AE500.20C1

Electronic power supply current