


## Nyx Trimless fixed T50F - optic group

code LTN50K.940S/01

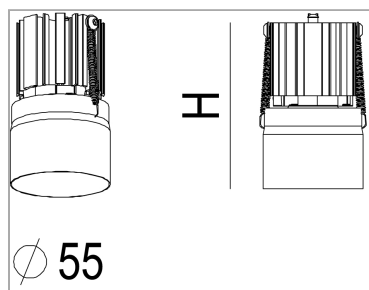

### PRODUCT DESCRIPTION

Recessed spotlight with round section for direct light ceiling installation. Optical unit made of 6060 aluminum obtained by machining on work center, Led COB 12 W or 18 W high efficiency assembled on black anodized aluminum heatsink, light source for visual comfort, 99% aluminized material optics, 9% high efficiency, fully retractable installation with special accessory mandatory. Pressure insertion with friction seal via o ring. Finish coated with epoxy powders of color white. Protection class IP20/IP54. Insulation class III. ATTENTION accessory mandatory

### PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	12 W / 18 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Spot 15°
Finishing	White
Luminous flux of the product	1400 lm / 2394 lm
Luminous efficiency	117 lm/W / 133 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Weight	0.30 Kg
Dimension	H110 Ø54.5 mm
Hole size	Ø 75 mm
IP Grade	IP20/54
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## **MANDATORY ACCESSORIES**

### **Outer Casing Nyx T50 and T35D trimless for false ceiling**

Formwork for fixing Nyx T50F and Nyx T35D to plasterboard.



code LTN04A


Formwork for fixing Nyx T50F and Nyx T35D to plasterboard.

Technical Sheet



### **Frame Nyx For Brickwall T35D e T50F outer casing box for brick wall**

Frame for brick wall for Nyx T35D e T50F.



code LTN04B

Frame for brick wall for Nyx T35D e T50F.

Technical Sheet



### **AE350.16C (Copia)**



code AE350.15C

Electronic power supply current

### **AE500.20C1**



code AE500.20C1

Electronic power supply current