


## Nyx Trimless fixed T50F - optic group

code LTN50K.930F/01

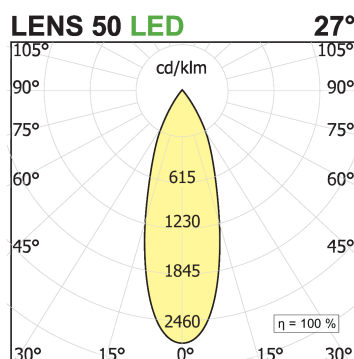

### PRODUCT DESCRIPTION

Recessed spotlight with round section for direct light ceiling installation. Optical unit made of 6060 aluminum obtained by machining on work center, Led COB 12 W or 18 W high efficiency assembled on black anodized aluminum heatsink, light source for visual comfort, 99% aluminized material optics, 9% high efficiency, fully retractable installation with special accessory mandatory. Pressure insertion with friction seal via o ring. Finish coated with epoxy powders of color white. Protection class IP20/IP54. Insulation class III. ATTENTION accessory mandatory

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | Trimless recessed           |
| Light source                 | LED                         |
| Absorbed power               | 12 W / 18 W                 |
| Color temperature            | 3000K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Flood 27°                   |
| Finishing                    | White                       |
| Luminous flux of the product | 1285 lm / 2251 lm           |
| Luminous efficiency          | 107 lm/W / 125 lm/W         |
| MacAdam color tolerance      | 2                           |
| Life time estimate           | 2SCDM 50.000h L90 B10 ta25° |
| Energy efficiency class      | D                           |
| Weight                       | 0.30 Kg                     |
| Dimension                    | H110 Ø54.5 mm               |
| Hole size                    | Ø 75 mm                     |
| IP Grade                     | IP20/54                     |
| Protection Class             | Class III appliance         |
| Product Spec                 | Circular shape              |
| Power supply/Transformer     | Not included                |
| Protocol                     | See power supply            |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## MANDATORY ACCESSORIES

### Outer Casing Nyx T50 and T35D trimless for false ceiling

Formwork for fixing Nyx T50F and Nyx T35D to plasterboard.



code LTN04A

Formwork for fixing Nyx T50F and Nyx T35D to plasterboard.

Technical Sheet



### Frame Nyx For Brickwall T35D e T50F outer casing box for brick wall

Frame for brick wall for Nyx T35D e T50F.



code LTN04B

Frame for brick wall for Nyx T35D e T50F.

Technical Sheet



### AE350.16C (Copia)



code AE350.15C

Electronic power supply current

### AE500.20C1



code AE500.20C1

Electronic power supply current