


Nyx Trimless fixed T35F - optic group

code LTN30K.935F/01


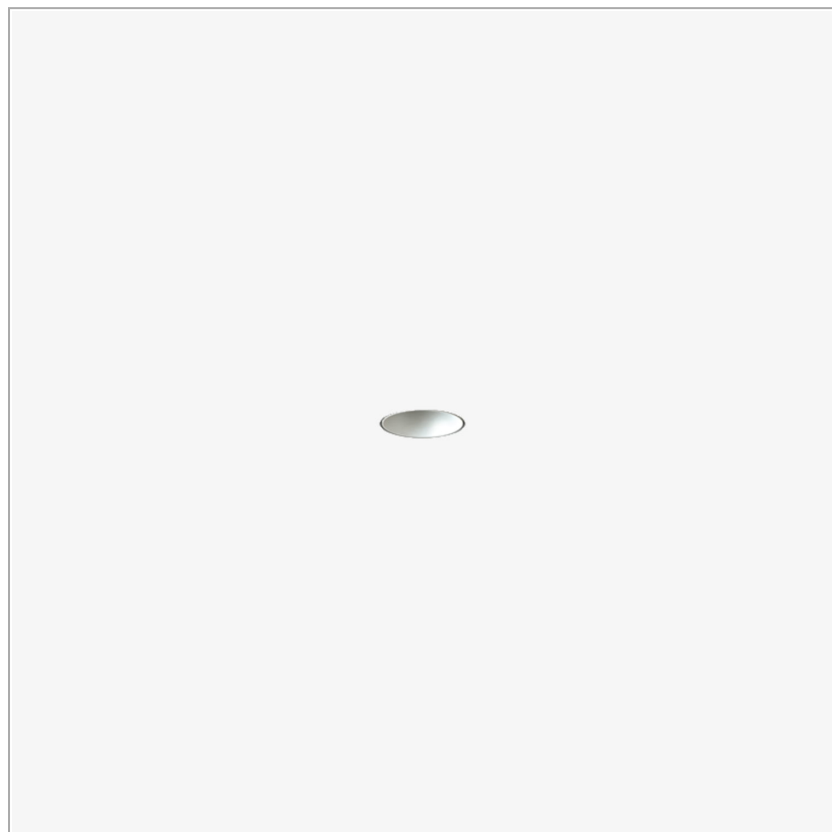


PRODUCT DESCRIPTION

Recessed spotlight with round section for direct light ceiling installation. Optical unit made of 6060 aluminum obtained by machining on work center, Led COB 5 W high efficiency assembled on black anodized aluminum heatsink, light source for visual comfort, 99% aluminized material optics, 9% high efficiency, fully retractable installation with special accessory mandatory. Pressure insertion with friction seal via o ring. Finish coated with epoxy powders of color white. Protection class IP20/IP54. Insulation class III.

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	5 W
Color temperature	3500K
Color rendering index CRI	>90
Optic	Flood 22°
Finishing	White
Luminous flux of the product	703 lm
Luminous efficiency	141 lm/W
MacAdam color tolerance	2
Life time estimate	50000h L90 B10 ta 25°C
Energy efficiency class	D
Weight	0.11 Kg
Dimension	H84 Ø40 mm
Hole size	Ø 65 mm
IP Grade	IP20/54 / IP20/54
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

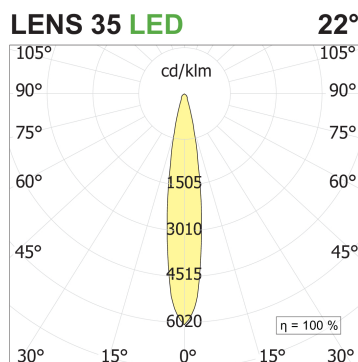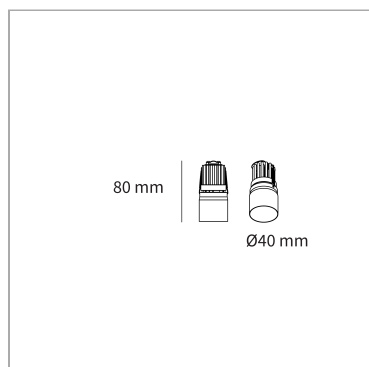

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

Accessori Outer Casing Nyx T For False Ceiling T35F outer casing for plasterboard




code LTN03A

Trimless recessed uncategorized outer casing for plasterboard

Technical Sheet



Accessori Wallbox Nyx For Brickwall T35F outer casing box for brick wall



code LTN03B

Trimless recessed indoor outer casing for brick wall square shape

Technical Sheet



AE500.14C



code AE500.14C

Electronic power supply current

