


## Nyx Trimless fixed T35F - optic group

code LTN30K.940F/01


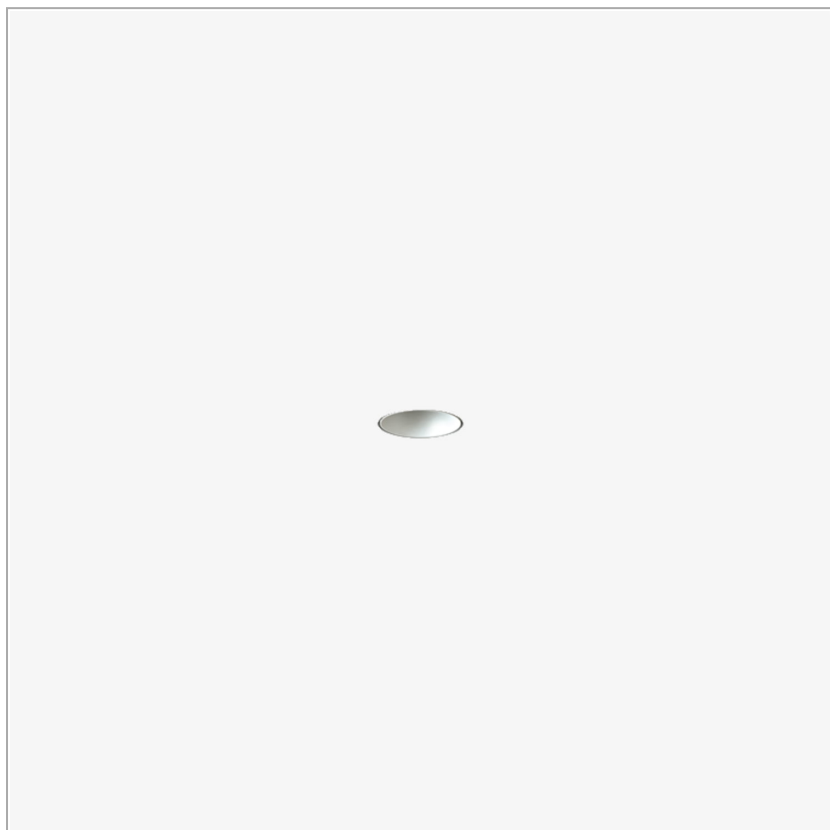


### PRODUCT DESCRIPTION

Recessed spotlight with round section for direct light ceiling installation. Optical unit made of 6060 aluminum obtained by machining on work center, Led COB 5 W high efficiency assembled on black anodized aluminum heatsink, light source for visual comfort, 99% aluminized material optics, 9% high efficiency, fully retractable installation with special accessory mandatory. Pressure insertion with friction seal via o ring. Finish coated with epoxy powders of color white. Protection class IP20/IP54. Insulation class III.

### PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	5 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 22°
Finishing	White
Luminous flux of the product	703 lm
Luminous efficiency	141 lm/W
MacAdam color tolerance	2
Life time estimate	50000h L90 B10 ta 25°C
Energy efficiency class	D
Weight	0.11 Kg
Dimension	H84 Ø40 mm
Hole size	Ø 65 mm
IP Grade	IP20/54 / IP20/54
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

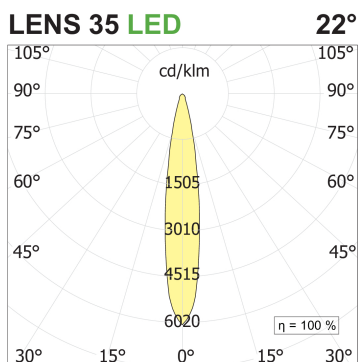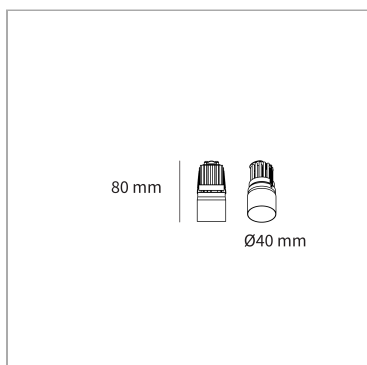

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## **MANDATORY ACCESSORIES**

### **Accessori Outer Casing Nyx T For False Ceiling T35F outer casing for plasterboard**




code LTN03A

Trimless recessed uncategorized outer casing for plasterboard

Technical Sheet



### **Accessori Wallbox Nyx For Brickwall T35F outer casing box for brick wall**

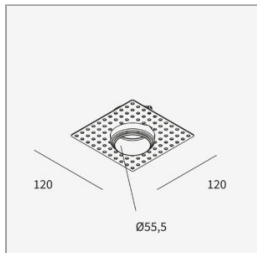

code LTN03B

Trimless recessed indoor outer casing for brick wall square shape

Technical Sheet



### **AE500.14C**



code AE500.14C

Electronic power supply current

