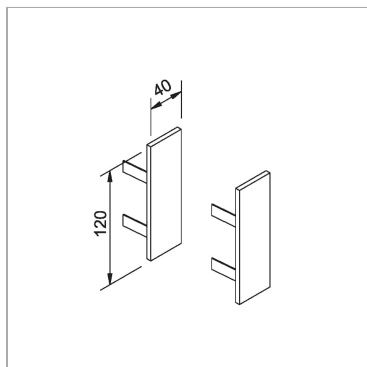


**File H System Couple of closure heads**

code LT2404/01

**PRODUCT DESCRIPTION**

Modular system for direct, diffused and/or accent lighting, consisting of hollow profiles made from 120x40 mm painted or anodised extruded aluminium, with a predefined length or cut to measure, available in the following versions: wall-mounted, suspended. To be integrated with LED linear light sources, battens for T16 and T16 seamless fluorescent lamps and max 16A 3-circuit track modules for inclusion of projectors. Fluorescent battens, complete with 50/60 Hz 230/240 V electronic power supply, LED batten driver included. To be completed with side end caps with Light Proof system, opal white or microprismatic PC diffusing screen (in accordance with EN 12464-1), closing profiles, with a predefined length or cut to measure, or dark-light aluminium grille with high specular qualities and mounting brackets or suspension cables. IP20 or IP40 protection rating.

**PRODUCT SPECS**

Installation method	system
Finishing	White
Power supply/transformer	Not included
Weight	0.09 Kg
Dimension	mm

**WEB PAGE****ASSEMBLY INSTRUCTIONS**