



Zero51 suspension

code IC220.830D

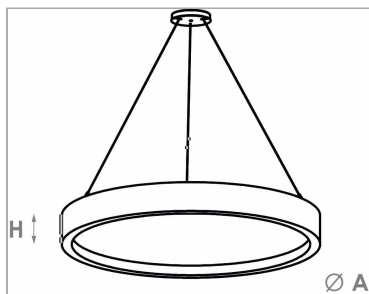

ZERO51 LED

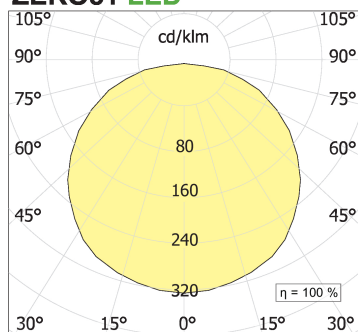

PRODUCT DESCRIPTION

Hanging appliance for direct diffused interior lighting, for LED source lamps. Body in CementoPiuma, lightweight fiber concrete, with "smoothed concrete" hand- crafted finishing. Diffusing screen in white opaline PMMA. Built-in electronic driver 50/60Hz 230/240V. Equipped with suspension system 4000 mm. with millimetric adjustment. Maintenance by removing the diffuser without the use of tools. Degree of protection IP40.

PRODUCT SPECS

Installation method	Suspension
Light source	LED
Absorbed power	48 W
Color temperature	3000K
Color rendering index CRI	80
Luminous flux of the product	3358 lm
Luminous efficiency	70 lm/W
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	Dimmable Dali
Energy efficiency class	E
Weight	18 Kg
Dimension	H150 Ø700 mm
IP Grade	IP30
Product Spec	Circular shape
Power supply	220-240V 50-60Hz

WEB PAGE



ASSEMBLY INSTRUCTIONS



