

## Zero51 suspension

code IC221.840




### PRODUCT DESCRIPTION


Hanging appliance for direct diffused interior lighting, for LED source lamps. Body in CementoPiuma, lightweight fiber concrete, with "smoothed concrete" hand- crafted finishing. Diffusing screen in white opaline PMMA. Built-in electronic driver 50/60Hz 230/240V. Equipped with suspension system 4000 mm. with millimetric adjustment. Maintenance by removing the diffuser without the use of tools. Degree of protection IP40.

### PRODUCT SPECS

Installation method	Suspension
Light source	LED
Absorbed power	96 W
Color temperature	4000K
Color rendering index CRI	80
Luminous flux of the product	7253 lm
Luminous efficiency	76 lm/W
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	E
Weight	27 Kg
Dimension	H150 Ø1000 mm
Product Spec	Circular shape
Power supply	220-240V 50-60Hz

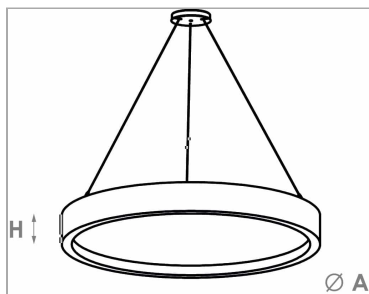

### ZERO51 LED

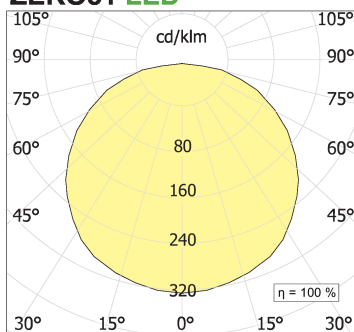

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



