


## Zero51 ceiling

code IC210.830D



### ZERO51 LED

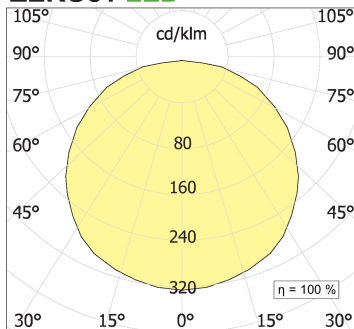

### PRODUCT DESCRIPTION

LED ceiling light. Body in CementoPiuma®, lightweight fibrous cement, with hand-made "smooth concrete" finish, diameter 700 mm. 48W LED light unit, integrated electronic power supply. Voltage In 220/240V 50/60Hz. Protection degree IP30. WARNING: This product has been realized with hand crafted procedures and not industrial. Small imperfections, voids, subsidence and ripples of the surface are deliberately present and they are a feature of the product, proving the hand-made manufacturing procedure.

### PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	LED
Absorbed power	48 W
Color temperature	3000K
Color rendering index CRI	80
Luminous flux of the product	3358 lm
Luminous efficiency	70 lm/W
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	Dimmable Dali
Energy efficiency class	E
Weight	17 Kg
Dimension	H150 Ø700 mm
IP Grade	IP30
Product Spec	Circular shape
Power supply	220-240V 50-60Hz

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



