


Zero51 ceiling

code IC211.830



ZERO51 LED

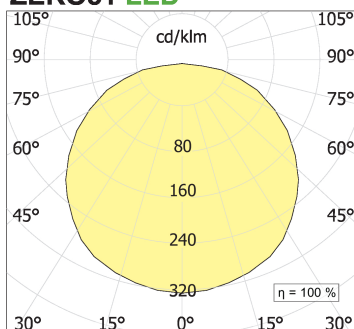

PRODUCT DESCRIPTION

LED ceiling light. Body in CementoPiuma®, lightweight fibrous cement, with hand-made "smooth concrete" finish, diameter 1000 mm. 48W LED light unit, integrated electronic power supply. Voltage In 220/240V 50/60Hz. Protection degree IP30. WARNING: This product has been realized with hand crafted procedures and not industrial. Small imperfections, voids, subsidence and ripples of the surface are deliberately present and they are a feature of the product, proving the hand-made manufacturing procedure.

PRODUCT SPECS

| | |
|------------------------------|---------------------------------|
| Installation method | Ceiling surface mounted |
| Light source | LED |
| Absorbed power | 96 W |
| Color temperature | 3000K |
| Color rendering index CRI | 80 |
| Luminous flux of the product | 6716 lm |
| Luminous efficiency | 70 lm/W |
| Life time estimate | 3SDCM 50000h L90 B10 Ta 25°C |
| Protocol | On/Off |
| Energy efficiency class | E |
| Weight | 26 Kg |
| Dimension | H150 Ø1000 mm |
| Product Spec | Circular shape |
| Power supply | 220-240V 50-60Hz |

WEB PAGE



ASSEMBLY INSTRUCTIONS



