


## Brique O wall Outdoor

code IC810.827

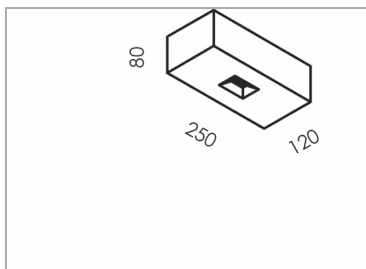

### PRODUCT DESCRIPTION

Wall appliance for interior and outdoor lighting, for LED source lamps, available in monoemission and bi-emission versions. Body in VFRC (vinilic fiber reinforced concrete) with "smoothed concrete" hand-crafted finishing. Aluminium optical unit complete with 8/16W LED source (720/1480 lumens fed at 500mA), 50/60Hz 230/240V built-in electronic driver, steel mounting plate for fixture to the wall. Degree of protection IP65.

### PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	8 W
Color temperature	2700K
Color rendering index CRI	>90
Luminous flux of the product	747 lm
Luminous efficiency	93 lm/W
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	D
Weight	3 Kg
Dimension	L250xW120xH80 mm
IP Grade	IP65
Power supply	220-240V 50-60Hz

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



