

Brique O wall Outdoor

code IC810.827





















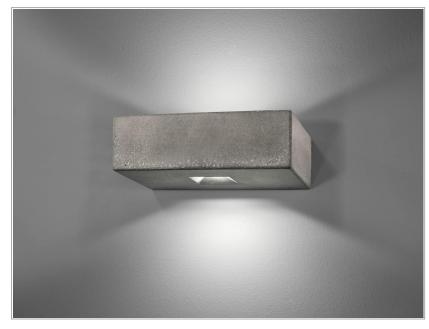



PRODUCT DESCRIPTION

Wall appliance for interior and outdoor lighting, for LED source lamps, available in monoemission and bi-emission versions. Body in VFRC (vinilic fiber reinforced concrete) with "smoothed concrete" hand-crafted finishing. Aluminium optical unit complete with 8/16W LED source (720/1480 lumens fed at 500mA), 50/60Hz 230/240V built-in electronic driver, steel mounting plate for fixture to the wall. Degree of protection IP65.

PRODUCT SPECS

Wall surface mounted
LED
8 W
2700K
>90
747 lm
93 lm/W
3SDCM 50000h L90 B10 Ta 25°C
On/Off
D
3 Kg
L250xW120xH80 mm
IP65
220-240V 50-60Hz

WEB PAGE



ASSEMBLY



