

## Brique V wall Outdoor

code IC910.830




### PRODUCT DESCRIPTION

Wall appliance for interior and outdoor lighting, for LED source lamps, available in monoemission and bi-emission versions. Body in VFRC (vinilic fiber reinforced concrete) with "smoothed concrete" hand-crafted finishing. Aluminium optical unit complete with 6/12W LED source, 50/60Hz 120/240V built-in electronic driver, steel mounting plate for fixture to the wall. Degree of protection IP65.

### PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	8 W
Color temperature	3000K
Color rendering index CRI	>90
Luminous flux of the product	758 lm
Luminous efficiency	95 lm/W
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	D
Weight	3 Kg
Dimension	L100xW120xH200 mm
IP Grade	IP65
Power supply	220-240V 50-60Hz

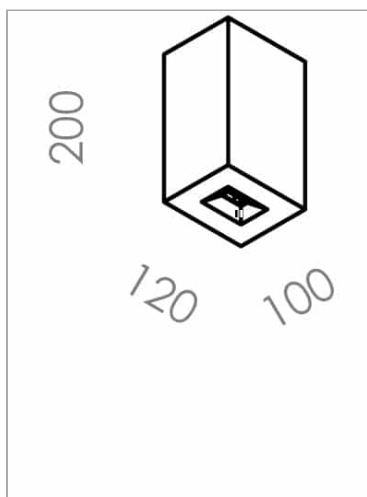

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



