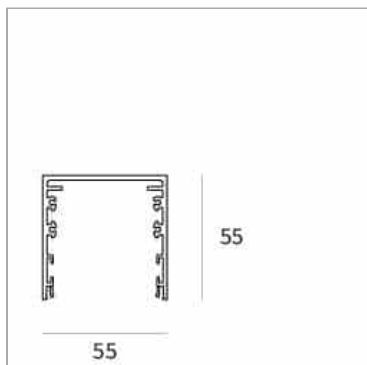


**Fifty5 System - Ceiling empty profile**

code FT030.2000/01

**PRODUCT DESCRIPTION**

Modular system, in extruded aluminum 55x55mm, for ceiling installation, suspension and recessed trimless (through the use of special accessories) to complete with the necessary dedicated accessories. Textured or anodized painted finish. Diffused light screens in opal polycarbonate, professional optics with different beam openings and, if necessary, equipped with spectra for horticulture and tunable white TW. Possibility of insertion of anti-glare eyelid with patent pending attachment system. Degree of protection IP40


**PRODUCT SPECS**

|                     |          |
|---------------------|----------|
| Installation method | system   |
| Finishing           | White    |
| Dimension           | W2000 mm |

**WEB PAGE****ASSEMBLY INSTRUCTIONS**

## OPTIONAL ACCESSORIES

### Fifty5 System – Couple of heads



code FT040/01

Modular system, in extruded aluminum 55x55mm, for ceiling installation, suspension and recessed trimless (through the use of special accessories) to complete with the necessary dedicated accessories. Textured or anodized painted finish. Diffused light screens in opal polycarbonate, professional optics with different beam openings and, if necessary, equipped with spectra for horticulture and tunable white TW. Possibility of insertion of anti-glare eyelid with patent pending attachment system. Degree of protection IP40

Technical Sheet



### Linear connectors for wallbox



code LT2482

Trimless, fully-retracting flush recessed modular systems for housing system profiles and MINIFILE, FILE, FILE 2, FILE 2 COMPLEMENTI, LEVA and FARETÈN finished modules for creating cuts of continuous light or where light modules alternate to voids, in plaster-board false-ceiling or false-walls or in concrete or brick walls. Painted or anodized extruded aluminium body, with a predefined length or cut to size. To be completed with side end caps and finishing cover for the empty spaces in a retracted position to determine an effect of solids and voids. Can also be used with LED linear light sources, to be completed with opal white PC diffusing screen and remote power supplies, to create retracted grooves of light.

Technical Sheet



### Fifty5 System – Opaline polycarbonate diffuser



code FT033.1000

Modular system, in extruded aluminum 55x55mm, for ceiling installation, suspension and recessed trimless (through the use of special accessories) to complete with the necessary dedicated accessories. Textured or anodized painted finish. Diffused light screens in opal polycarbonate, professional optics with different beam openings and, if necessary, equipped with spectra for horticulture and tunable white TW. Possibility of insertion of anti-glare eyelid with patent pending attachment system. Degree of protection IP40

Technical Sheet



code FT033.2000

Modular system, in extruded aluminum 55x55mm, for ceiling installation, suspension and recessed trimless (through the use of special accessories) to complete with the necessary dedicated accessories. Textured or anodized painted finish. Diffused light screens in opal polycarbonate, professional optics with different beam openings and, if necessary, equipped with spectra for horticulture and tunable white TW. Possibility of insertion of anti-glare eyelid with patent pending attachment system. Degree of protection IP40

Technical Sheet



code FT033.3000

Modular system, in extruded aluminum 55x55mm, for ceiling installation, suspension and recessed trimless (through the use of special accessories) to complete with the necessary dedicated accessories. Textured or anodized painted finish. Diffused light screens in opal polycarbonate, professional optics with different beam openings and, if necessary, equipped with spectra for horticulture and tunable white TW. Possibility of insertion of anti-glare eyelid with patent pending attachment system. Degree of protection IP40

Technical Sheet



code FT033.misura

Modular system, in extruded aluminum 55x55mm, for ceiling installation, suspension and recessed trimless (through the use of special accessories) to complete with the necessary dedicated accessories. Textured or anodized painted finish. Diffused light screens in opal polycarbonate, professional optics with different beam openings and, if necessary, equipped with spectra for horticulture and tunable white TW. Possibility of insertion of anti-glare eyelid with patent pending attachment system. Degree of protection IP40

Technical Sheet



## Fifty5 System Steel suspension kit



code LTM047.4000

single steel suspension kit l.2000mm. one every 1,5 mt, 2 pieces minimum



code LTM047

single steel suspension kit l.2000mm. one every 1,5 mt, 2 pieces minimum

Technical Sheet



Technical Sheet



## Fifty5 System Power cable kit with ceiling canopy



code LTM048.3/01

l.2000 mm



code LTM048.4/01

l.2000 mm



code LTM048.5/01

l.2000 mm



code LTM048.7/01

l.2000 mm



code LTM048.9/01

l.2000 mm

Technical Sheet



Technical Sheet



Technical Sheet



Technical Sheet



Technical Sheet

