

## Leva Quadra Wall/ceiling Q9 adjustable

code LV316.930S/01





### PRODUCT DESCRIPTION

Fix and adjustable projectors family with chip on board LED sources. Mounting options: recessed, with frame or trimless, ceiling and wall-mounted and on 48V tracks, such as the Multi System by Stucchi. Fixture's body in painted extruded aluminum. Optical group complete with CRI>90 chip on board led, lens, antiglare housing and electronic driver (except for recessed versions). The optical group is fixed in the recessed version and adjustable (0-90° on the horizontal axis and 355° on the vertical axis) in the surface-mounted and track versions. Spot, flood and wide optics. UGR<19. Degree of protection IP20/40.

### PRODUCT SPECS

|                              |                                                  |
|------------------------------|--------------------------------------------------|
| Installation method          | Wall surface mounted,<br>Ceiling surface mounted |
| Light source                 | LED                                              |
| Absorbed power               | 9x2,2 W                                          |
| Color temperature            | 3000K                                            |
| Color rendering index CRI    | >90                                              |
| Optic                        | Spot 20°                                         |
| Finishing                    | White box - black optic                          |
| Luminous flux of the product | 1800 lm                                          |
| Luminous efficiency          | 91 lm/W                                          |
| MacAdam color tolerance      | 2                                                |
| Life time estimate           | 50000h Ta 25° L90B10                             |
| Protocol                     | On/Off                                           |
| Energy efficiency class      | E                                                |
| Weight                       | 0.90 Kg                                          |
| Dimension                    | L98xW98xH90 mm                                   |
| IP Grade                     | IP20                                             |
| Power supply                 | 220-240V 50-60Hz                                 |

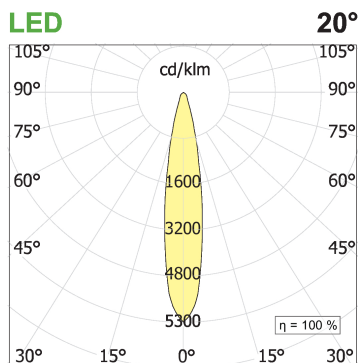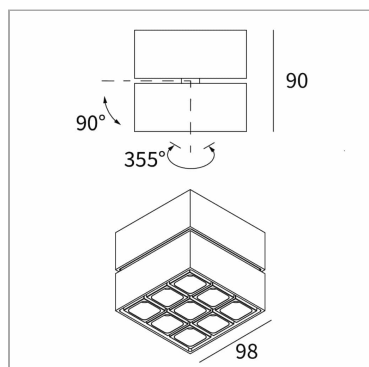

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

