

Focus M26 magnetic

code FS001.940F/01




PRODUCT DESCRIPTION

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of +/- 90, equipped with magnetic round board; powder coating or galvanic treatment; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish white.

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	LED
Absorbed power	5,7 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	571 lm
Luminous efficiency	100 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Energy efficiency class	E
Dimension	H85 Ø26 mm
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

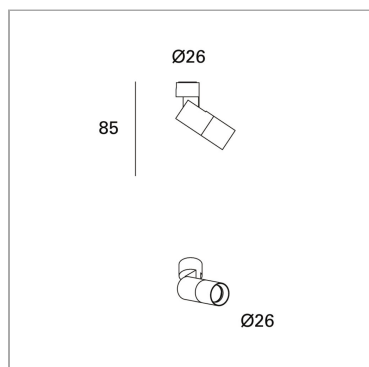

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Accessories Focus Magnet anchor cover M26



code FSA02.26/01

Anchor cover magnets series FOCUS 26

Technical Sheet



