

## Focus 2BR26 rectangular base

code FS451.927F/01





### PRODUCT DESCRIPTION

Double cylindrical projector in extruded aluminium, adjustable on the vertical axis of 35°, and on the horizontal axis of +/- 90°, with rectangular base; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, ellipsoid lens, asymmetric lens, satined lens. Color finish white.

### PRODUCT SPECS

|                              |                                                  |
|------------------------------|--------------------------------------------------|
| Installation method          | Wall surface mounted,<br>Ceiling surface mounted |
| Light source                 | LED                                              |
| Absorbed power               | 2x5,7 W                                          |
| Color temperature            | 2700K                                            |
| Color rendering index CRI    | >90                                              |
| Optic                        | Flood 27°                                        |
| Finishing                    | White                                            |
| Luminous flux of the product | 1131 lm                                          |
| Luminous efficiency          | 99 lm/W                                          |
| MacAdam color tolerance      | 3                                                |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C                  |
| Protocol                     | On/Off                                           |
| Energy efficiency class      | E                                                |
| Dimension                    | W115xH120 Ø26 mm                                 |
| IP Grade                     | IP20                                             |
| Power supply                 | 220-240V 50-60Hz                                 |

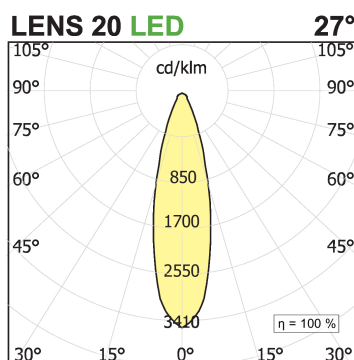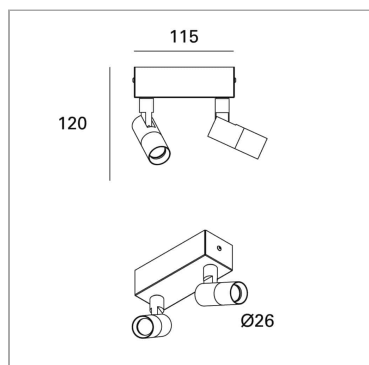

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

