
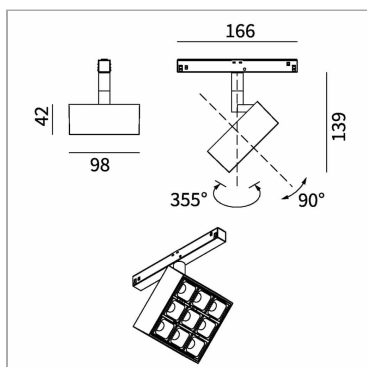


## Leva Quadra Mini Track Q9 48V trimless recessed

code LV325A.927SD/01



### PRODUCT DESCRIPTION

Fix and adjustable projectors family with chip on board LED sources. Mounting options: recessed, with frame or trimless, ceiling and wall-mounted and on 48V tracks, such as the Multi System by Stucchi. Fixture's body in painted extruded aluminum. Optical group complete with CRI>90 chip on board led, lens, antiglare housing and electronic driver (except for recessed versions). The optical group is fixed in the recessed version and adjustable (0-90° on the horizontal axis and 355° on the vertical axis) in the surface-mounted and track versions. Spot, flood and wide optics. UGR<19. Degree of protection IP20/40.

### PRODUCT SPECS

|                              |                         |
|------------------------------|-------------------------|
| Installation method          | Track                   |
| Light source                 | LED                     |
| Absorbed power               | 9x2,2 W                 |
| Color temperature            | 2700K                   |
| Color rendering index CRI    | >90                     |
| Optic                        | Spot 20°                |
| Finishing                    | White box - black optic |
| Luminous flux of the product | 1783 lm                 |
| Luminous efficiency          | 90 lm/W                 |
| MacAdam color tolerance      | 3                       |
| Life time estimate           | 60.000H L80 B10         |
| Protocol                     | Dimmable Dali           |
| Energy efficiency class      | D                       |
| Weight                       | 0.90 Kg                 |
| Dimension                    | L98xW98xH60+a mm        |
| IP Grade                     | IP20                    |
| Power supply/Transformer     | Not included            |
| Protocol                     | See power supply        |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1