

## Focus P55 plate

code FS203.930W/01





### PRODUCT DESCRIPTION

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of +/- 90, plate base with spring for hooking to plasterboard; powder coating or galvanic treatment; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish white.

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | Recessed with frame         |
| Light source                 | LED                         |
| Absorbed power               | 12 W / 18 W                 |
| Color temperature            | 3000K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Wide 46°                    |
| Finishing                    | White                       |
| Luminous flux of the product | 1289 lm / 1579 lm           |
| Luminous efficiency          | 107 lm/W / 88 lm/W          |
| MacAdam color tolerance      | 2                           |
| Life time estimate           | 2SCDM 50.000h L90 B10 ta25° |
| Energy efficiency class      | D                           |
| Dimension                    | H138 Ø55 mm                 |
| Hole size                    | Ø 52 mm                     |
| IP Grade                     | IP20                        |
| Protection Class             | Class III appliance         |
| Power supply/Transformer     | Not included                |
| Protocol                     | See power supply            |

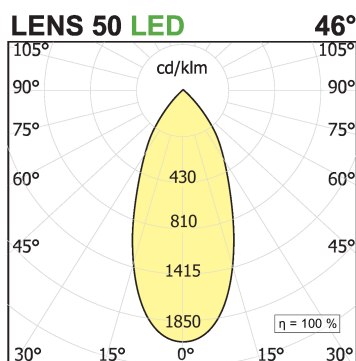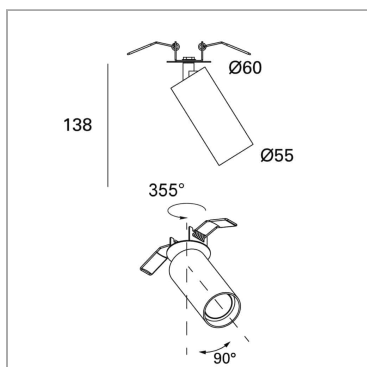

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## MANDATORY ACCESSORIES

### **AE350.16C (Copia)**



code AE350.15C

Electronic power supply current

### **AE500.20C1**



code AE500.20C1

Electronic power supply current

## OPTIONAL ACCESSORIES

### **Accessori Lens With Ring Asymmetric lens with ring ø55**




code L055A.A/01

Sistema modulare per illuminazione diretta, indiretta e/o d'accento, composto da profili vuoti in estruso di alluminio verniciato o anodizzato 90×30 mm. di lunghezza predefinita o tagliabili a misura. Da integrare con sorgenti lineari LED, proiettori. Da completare con le testate di chiusura laterali con sistema Light Proof, schermo diffondente in PC opalino bianco, cover di chiusura cieche.

Technical Sheet



### **Accessori Lens With Ring Elipsoid lens with ring ø55**




code L055E.A/01

Sistema modulare per illuminazione diretta, indiretta e/o d'accento, composto da profili vuoti in estruso di alluminio verniciato o anodizzato 90×30 mm. di lunghezza predefinita o tagliabili a misura. Da integrare con sorgenti lineari LED, proiettori. Da completare con le testate di chiusura laterali con sistema Light Proof, schermo diffondente in PC opalino bianco, cover di chiusura cieche.

Technical Sheet



### **Accessori Lens With Ring Honeycomb louver with ring ø55**



code L055R.A/01

Sistema modulare per illuminazione diretta, indiretta e/o d'accento, composto da profili vuoti in estruso di alluminio verniciato o anodizzato 90×30 mm. di lunghezza predefinita o tagliabili a misura. Da integrare con sorgenti lineari LED, proiettori. Da completare con le testate di chiusura laterali con sistema Light Proof, schermo diffondente in PC opalino bianco, cover di chiusura cieche.

Technical Sheet



### **Accessori Lens With Ring Satin lens with rings ø55**

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.



code L055S.A/01

Sistema modulare per illuminazione diretta, indiretta e/o d'accento, composto da profili vuoti in estruso di alluminio verniciato o anodizzato 90×30 mm. di lunghezza predefinita o tagliabili a misura. Da integrare con sorgenti lineari LED, proiettori. Da completare con le testate di chiusura laterali con sistema Light Proof, schermo diffondente in PC opalino bianco, cover di chiusura cieche.

Technical Sheet

