

Fifty5 ceiling

code FT112.827/01





PRODUCT DESCRIPTION

Linear lighting fixtures, in extruded aluminum 55x55mm, for ceiling, suspension. Embossed painted finish. Screens for diffused light in opal polycarbonate, for the PRO version are available optics with different beam openings. Might be equipped, if necessary, with spectra for horticulture. IP40 / IP43. Available default modules and modular system.

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	LED
Absorbed power	19,2 W
Color temperature	2700K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	1371 lm
Luminous efficiency	71 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	On/Off
Energy efficiency class	E
Dimension	L862 mm
IP Grade	IP40
Power supply	220-240V 50-60Hz

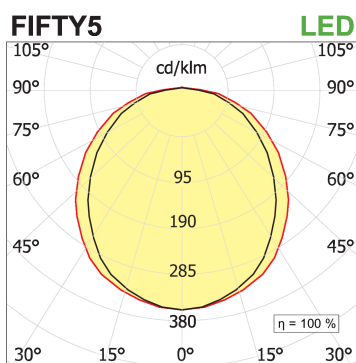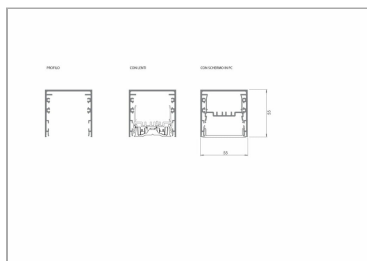

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 1 / 1