
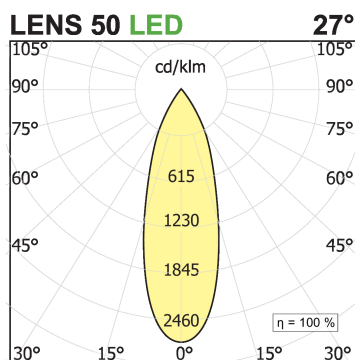


## Focus Mini Track T55 trimless back recessed

code FS503A.940FD/01

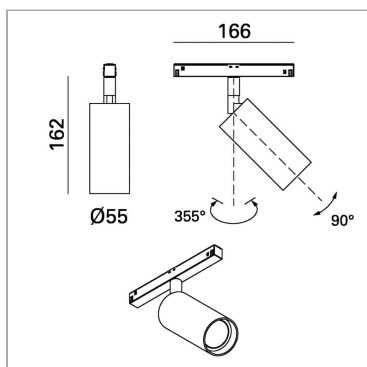

### PRODUCT DESCRIPTION

Cylindrical projector in extruded aluminum for installation on Mini Track System, electrified track in very low voltage; installation and positioning by means of quick-coupling insertion tools free; adjustable on the vertical axis of 355 and on the horizontal axis of +/- 90; powder coating; with COB (Chip on Board) technology for maximum efficiency; absence of multiple shadows; energy efficient LEDs with high color rendering; on-board electronic converter with Dali2 DT8 2-channel protocol; rear optical group; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; hot plug protection and power supply without respect for polarity; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish white.

### PRODUCT SPECS

|                              |                       |
|------------------------------|-----------------------|
| Installation method          | Track                 |
| Light source                 | LED                   |
| Absorbed power               | 18 W                  |
| Color temperature            | 4000K                 |
| Color rendering index CRI    | >90                   |
| Optic                        | Flood 27°             |
| Finishing                    | White                 |
| Luminous flux of the product | 1169 lm               |
| Luminous efficiency          | 65 lm/W               |
| MacAdam color tolerance      | 3                     |
| Life time estimate           | 50000h Ta 25° L80 B10 |
| Protocol                     | Dimmable Dali         |
| Energy efficiency class      | E                     |
| Dimension                    | W166 Ø55 mm           |
| IP Grade                     | IP20                  |
| Power supply/Transformer     | Not included          |
| Protocol                     | See power supply      |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

## OPTIONAL ACCESSORIES

### Accessori Lens With Ring Asymmetric lens with ring ø55



code L055A.A/01

Sistema modulare per illuminazione diretta, indiretta e/o d'accento, composto da profili vuoti in estruso di alluminio verniciato o anodizzato 90×30 mm. di lunghezza predefinita o tagliabili a misura. Da integrare con sorgenti lineari LED, proiettori. Da completare con le testate di chiusura laterali con sistema Light Proof, schermo diffondente in PC opalino bianco, cover di chiusura cieche.

Technical Sheet

