

IFERROSI Wall Mounted SPOT 120 + CBL

code IF30.927S/99





PRODUCT DESCRIPTION

Family of outdoor floor or wall luminaires, available in finished modules or in a modular system for maximum customization. Versions with LED source for accent light are available. Poles of different heights from 700mm to 3000mm are available, to be combined with spots of 6.7W or 18W. Fixing base or possibility to install in different surfaces: flange for wooden surfaces, clamp for concrete and stake for ground. IP54.

PRODUCT SPECS

| | |
|---------------------------|----------------------|
| Installation method | Wall surface mounted |
| Light source | Led |
| Absorbed power | 18 W |
| Color temperature | 2700K |
| Color rendering index CRI | >90 |
| Optic | Spot 21° |
| Finishing | Graphite |
| Luminaire luminous flux | 1626 lm |
| Luminous efficiency | 90 lm/W |
| Power supply/transformer | Included |
| Protocol | On/Off |
| Energy efficiency class | D |
| Weight | 1.7 Kg |
| Dimension | L191Hx200 Ø120 mm |
| IP Grade | Ip66 |
| Product Spec | Circular shape |

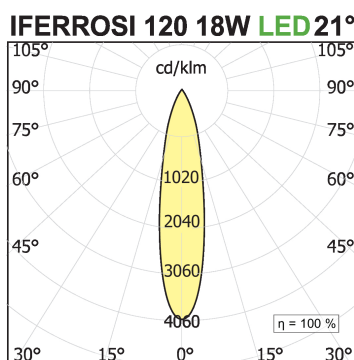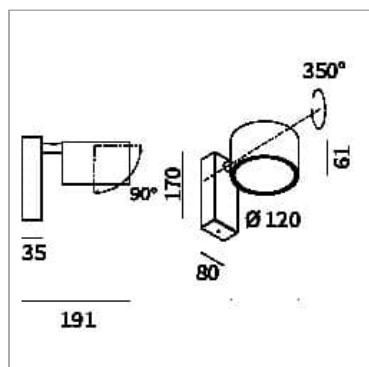

WEB PAGE



ASSEMBLY INSTRUCTIONS

