
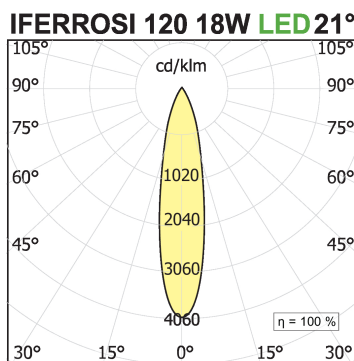


Iferrosi Wall Mounted SPOT 120 + CBL

code IF30.930S/99

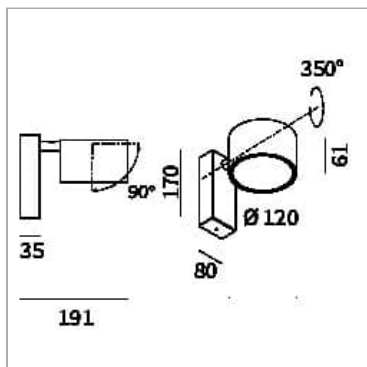

PRODUCT DESCRIPTION

Family of outdoor floor or wall luminaires, available in finished modules or in a modular system for maximum customization. Versions with LED source for accent light are available. Poles of different heights from 700mm to 3000mm are available, to be combined with spots of 6.7W or 18W. Fixing base or possibility to install in different surfaces: flange for wooden surfaces, clamp for concrete and stake for ground. IP54.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	Led
Absorbed power	18 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Spot 21°
Finishing	Graphite
Luminaire luminous flux	1643 lm
Luminous efficiency	91 lm/W
Power supply/transformer	Included
Protocol	On/Off
Energy efficiency class	D
Weight	1.7 Kg
Dimension	L191Hx200 Ø120 mm
IP Grade	Ip66
Product Spec	Circular shape

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 1 / 1