

## Iferosi Wall Mounted SPOT 60 + CBL

code IF31.940F/44C





### PRODUCT DESCRIPTION

Family of outdoor floor or wall luminaires, available in finished modules or in a modular system for maximum customization. Versions with LED source for accent light are available. Poles of different heights from 700mm to 3000mm are available, to be combined with spots of 6.7W or 18W. Fixing base or possibility to install in different surfaces: flange for wooden surfaces, clamp for concrete and stake for ground. IP54.

### PRODUCT SPECS

Installation method	Wall surface mounted
Light source	Led
Absorbed power	6,7 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 24°
Finishing	Champagne gold
Luminaire luminous flux	417 lm
Luminous efficiency	62 lm/W
MacAdam color tolerance	3
Power supply/transformer	Included
Protocol	On/Off
Energy efficiency class	D
Weight	0.8 Kg
Dimension	L130Hx200 Ø60 mm
IP Grade	Ip66

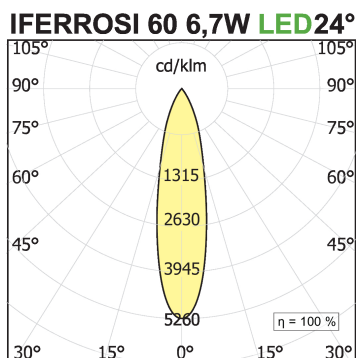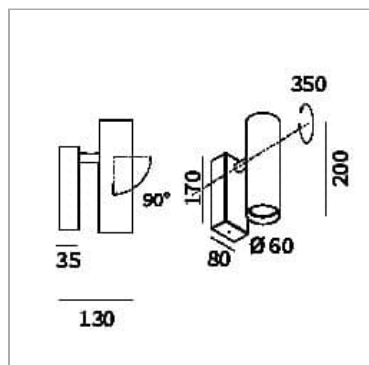

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

