

Iferrosi Wall Mounted SPOT 120

code IF20.930W/44C





PRODUCT DESCRIPTION

Family of outdoor floor or wall luminaires, available in finished modules or in a modular system for maximum customization. Versions with LED source for accent light are available. Poles of different heights from 700mm to 3000mm are available, to be combined with spots of 6.7W or 18W. Fixing base or possibility to install in different surfaces: flange for wooden surfaces, clamp for concrete and stake for ground. IP54.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	Led
Absorbed power	18 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Wide 39°
Finishing	Champagne gold
Luminaire luminous flux	1472 lm
Luminous efficiency	82 lm/W
Power supply/transformer	Not included
Protocol	See power supply
Energy efficiency class	D
Weight	1.3 Kg
Dimension	L174Hx75 Ø120 mm
IP Grade	Ip66
Protection Class	Class III appliance
Product Spec	Circular shape

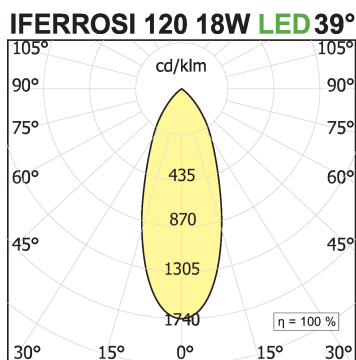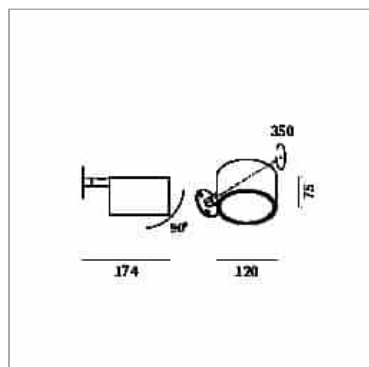

WEB PAGE



ASSEMBLY INSTRUCTIONS



