
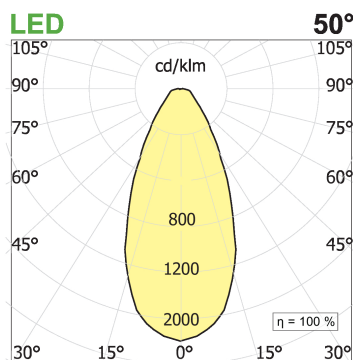
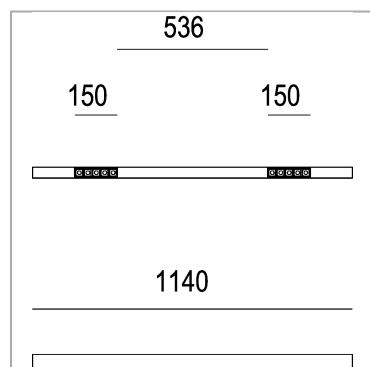


Ceiling File profile with Leva modules

code F1222.927WD/45

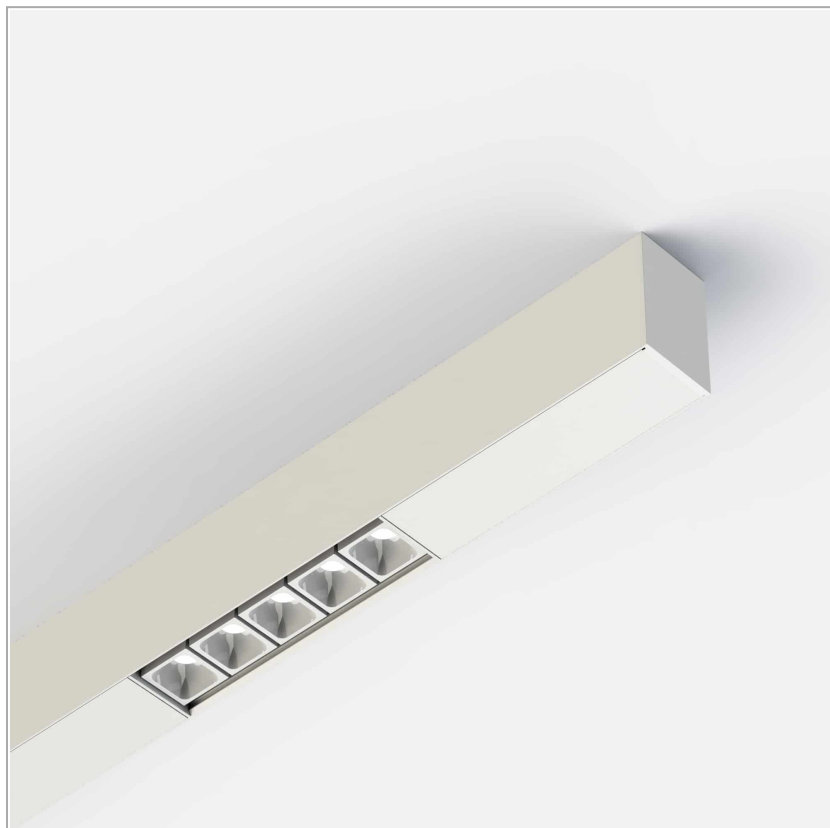

PRODUCT DESCRIPTION

Direct light indoor ceiling lamp made of extruded aluminum 6060, color rendering index CRI >90. Equipped with 2 groups Lever 5 spot series with high color rendering LED sources; temperature 2700K; fixed optics with aperture Wide 50°; protocol Dimmable Dali. Lamp with finish: Moka frame, gold optic. Degree of protection IP20.

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	LED
Absorbed power	10x2,2 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Wide 50°
Finishing	Moka frame, gold optic
Luminous flux of the product	2150 lm
Luminous efficiency	98 lm/W
MacAdam color tolerance	2
Durata media stimata	50000h Ta 25° L90B10
Protocol	Dimmable Dali
Energy efficiency class	E
Weight	2.40 Kg
Dimension	L1140 mm
IP Grade	IP20

WEB PAGE



ASSEMBLY INSTRUCTIONS

