
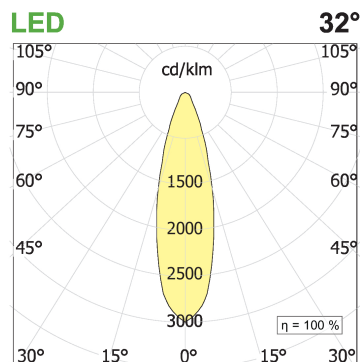


File suspension with Leva group direct or direct/indirect light

code F1324.930FD/43

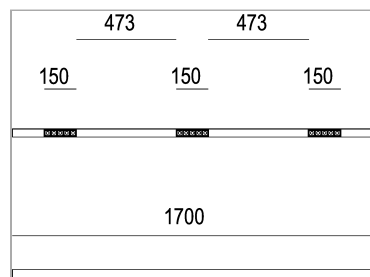

PRODUCT DESCRIPTION

Direct light indoor suspension lamp made of extruded aluminum 6060, color rendering index CRI >90. Equipped with 3 groups Lever 5 spot series with high color rendering LED sources; temperature 3000K; fixed optics with aperture Flood; protocol Dimmable. Lamp with finish: . Degree of protection IP20.

PRODUCT SPECS

Installation method	Suspension
Light source	Led-en
Absorbed power	15x2,2 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Flood
Finishing	43 - Moka frame, black optic
Luminaire luminous flux	3255 lm
Luminous efficiency	99 lm/W
MacAdam color tolerance	2
Durata media stimata	50000h Ta 25° L90B10
Protocol	Dimmable
Energy efficiency class	E
Weight	2.80 Kg
Dimension	L1700 mm
IP Grade	IP20

WEB PAGE



ASSEMBLY INSTRUCTIONS

