
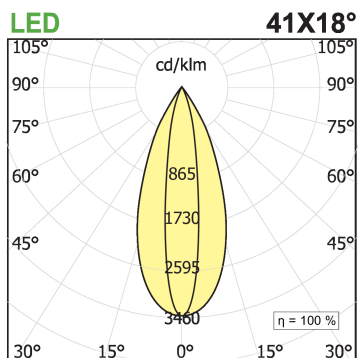
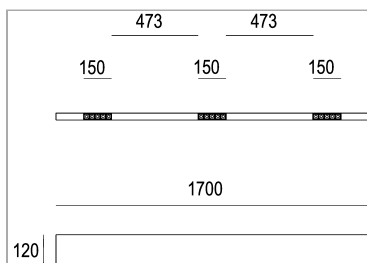


## File H suspension profile with Leva modules

code F1H14.927Z/01

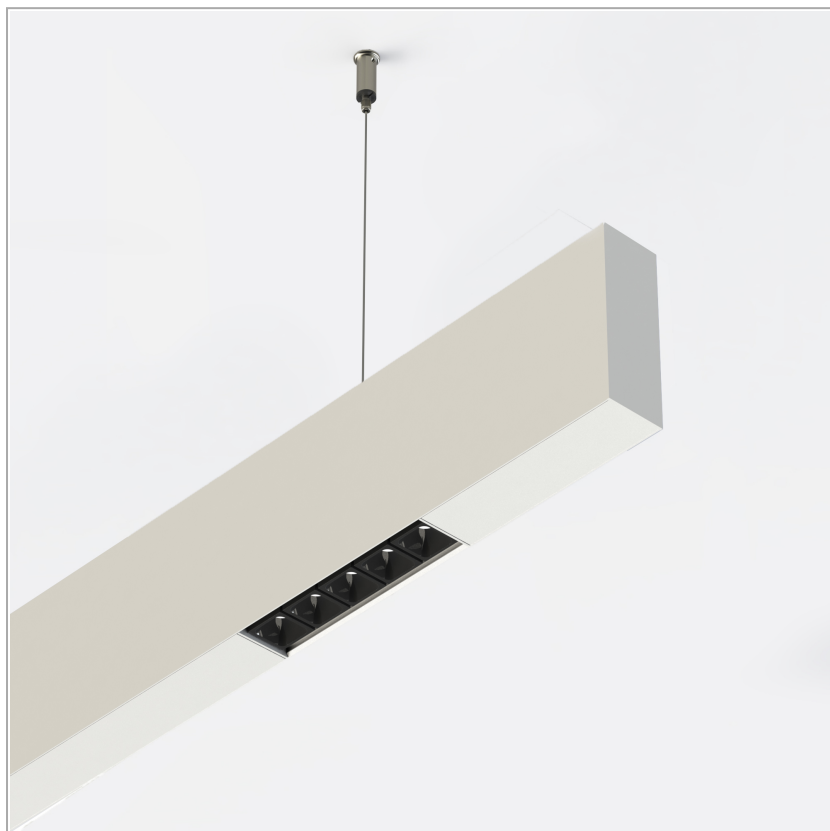

### PRODUCT DESCRIPTION

Direct and indirect light indoor suspension lamp made of extruded aluminum 6060, color rendering index CRI >90. Equipped with 3 groups Lever 5 spot series with high color rendering LED sources; temperature 2700K; fixed optics with aperture ; protocol On/Off. Lamp with finish: white box - black optic. Degree of protection IP20.Type of ceiling installation.

### PRODUCT SPECS

Installation method	Suspension
Light source	LED
Absorbed power	33 W / 38,4 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Asymmetric
Finishing	White box - black optic
Luminous flux of the product	5952 lm
Luminous efficiency	155 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C / 50000h Ta 25° L80B10
Protocol	On/Off
Energy efficiency class	D
Weight	3.70 Kg
Dimension	L1700 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1