

## Celing File H profile with Leva modules

code F1H24.927Z/01





### PRODUCT DESCRIPTION

Direct light indoor ceiling lamp made of extruded aluminum 6060, color rendering index CRI >90. Equipped with 3 groups Lever 5 spot series with high color rendering LED sources; temperature 2700K; fixed optics with aperture ; protocol On/Off. Lamp with finish: white box - black optic. Degree of protection IP20.

### PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	LED
Absorbed power	33 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Asymmetric
Finishing	White box - black optic
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	D
Weight	3.70 Kg
Dimension	L1700 mm

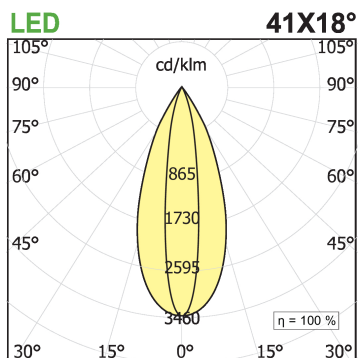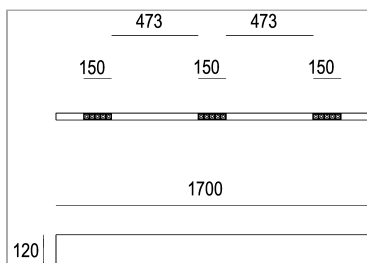

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.

Page 1 / 1