

## Celing File H profile with Leva modules

code F1H23.927ZD/01





### PRODUCT DESCRIPTION

Direct light indoor ceiling lamp made of extruded aluminum 6060, color rendering index CRI >90. Equipped with 2 groups Lever 5 spot series with high color rendering LED sources; temperature 2700K; fixed optics with aperture ; protocol Dimmable Dali. Lamp with finish: white box - black optic. Degree of protection IP20.

### PRODUCT SPECS

|                              |                                 |
|------------------------------|---------------------------------|
| Installation method          | Ceiling surface mounted         |
| Light source                 | LED                             |
| Absorbed power               | 22 W                            |
| Color temperature            | 2700K                           |
| Color rendering index CRI    | >90                             |
| Optic                        | Asymmetric                      |
| Finishing                    | White box - black optic         |
| Luminous flux of the product | 2150 lm                         |
| Luminous efficiency          | 98 lm/W                         |
| MacAdam color tolerance      | 2                               |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C |
| Protocol                     | Dimmable Dali                   |
| Energy efficiency class      | D                               |
| Weight                       | 3.00 Kg                         |
| Dimension                    | L1420 mm                        |

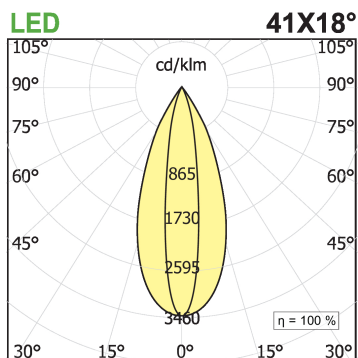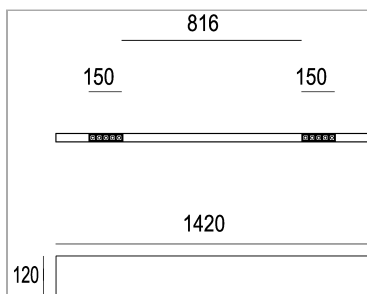

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.  
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.  
We reserve the right to make changes to our products at any time.

Page 1 / 1