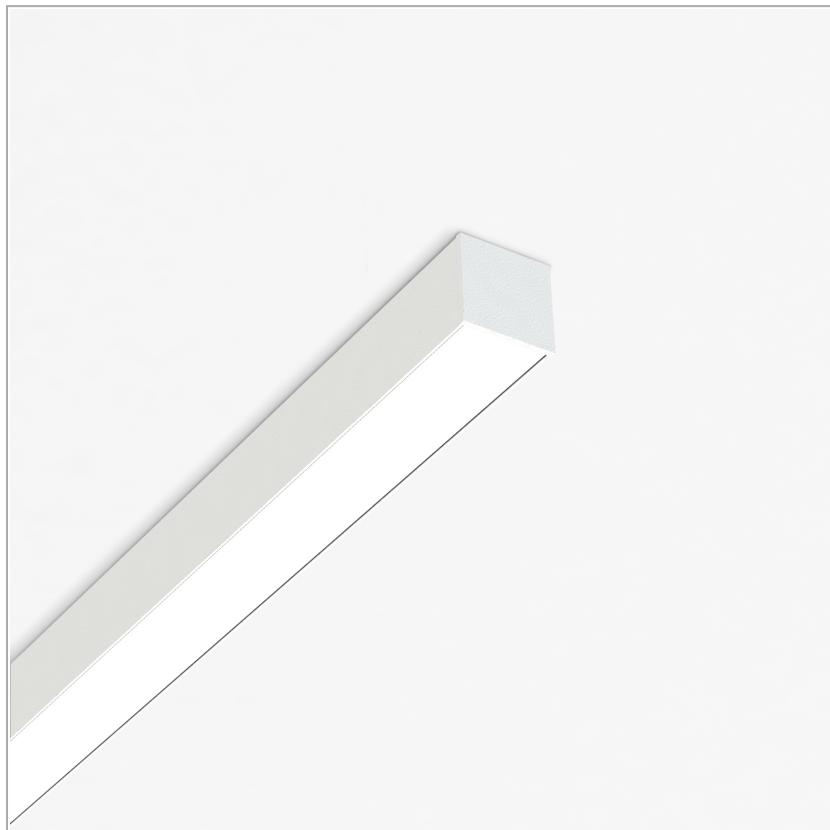


File 30 Ceiling

code F3021.840P/01

**PRODUCT DESCRIPTION**

Direct and diffused ceiling/wall lamp, extruded aluminium profile 30x30mm, colour rendering index CRI>80. Epoxy powder coating, colour finish white. Product complete with end and side cast caps in the same finish. Degree of protection IP40. Requires remote system for electronic power supply.

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	Linea Led
Absorbed power	21 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Opal polycarbonate diffuser
Finishing	White
Luminous flux of the product	2124 lm
Luminous efficiency	101 lm/W
Energy efficiency class	D
Weight	0.60 Kg
Dimension	L964 mm
IP Grade	IP40
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

**WEB PAGE****ASSEMBLY INSTRUCTIONS**

