
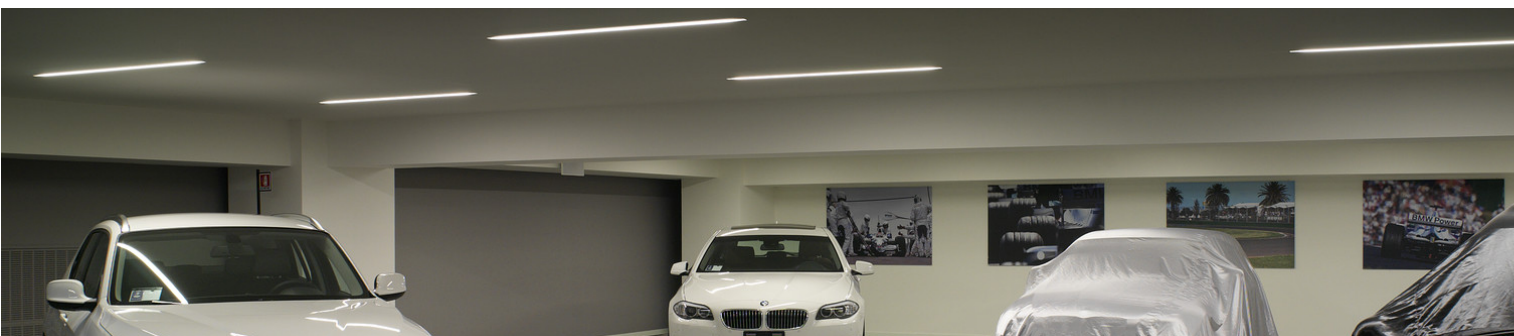
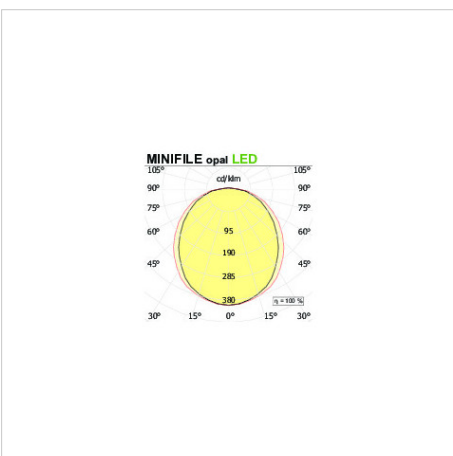


MINIFILE Recessed LED with diffuser

code ML007.827

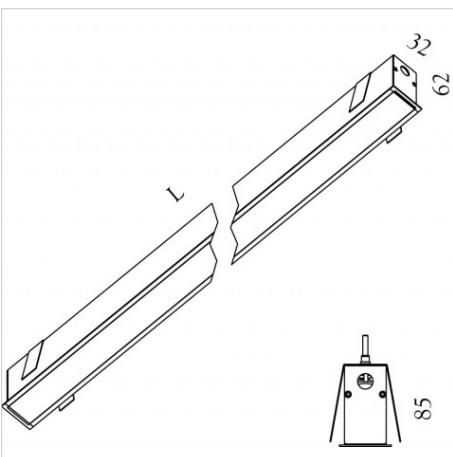

PRODUCT DESCRIPTION

Recessed with frame indoor direct emission lamp, complete of led 57,6W, color rendering index CRI >80, opal polycarbonate diffuser included. White/black/oxidised aluminium finishing direct emission lamp

PRODUCT FEATURES

| | |
|--|------------------------------------|
| Mounting method | recessed with frame |
| Lamps | linear LED |
| Wattage | 57,6W |
| Color temperature | 2700K |
| Color rendering index | >80 |
| Finishing | white / black / oxidised aluminium |
| Source luminous flux | 8928 lm |
| Diffuser | opal polycarbonate |
| Luminous flux | 3244 lm |
| Fitting efficiency | 56 lm/W |
| Chromaticity tolerance (initial 3 MacAdam) | |
| Estimated average life expectancy | 50000h Ta 25° L70B10 |
| Ballast | included |
| Protocol | On/Off |
| Mains voltage | 220-240V / 50-60Hz |
| Energy efficiency class | A+ |
| Dimension | L 2545 mm |
| Installation hole | mm 34xL+2 |
| Class of protection | Class I appliance |

ACCESSORIES

| | |
|-------------|--|
| LTMF.1000 | wallbox Minifile |
| LTMF.2000 | wallbox Minifile |
| LTMF.3000 | wallbox Minifile |
| LTMF.misura | wallbox Minifile |
| LTM200.1 | couple of closure heads for wallbox MINIFILE |