

LBS Ceiling perimetric emission

code LB002.840





PRODUCT DESCRIPTION

Ceiling indoor perimetric emission lamp circular shape, complete of linear led 18w/mt 168 led/mt 2300lm/mt 57W, color rendering index CRI >80, opal polycarbonate diffuser included. White/black finishing perimetric emission lamp. To be completed with power supply to be installed in a remote junction box

PRODUCT FEATURES

Mounting method	ceiling
Wattage	1x57W
Color rendering index	>80
Finishing	white / black
Source luminous flux	4000lm
Diffuser	opal polycarbonate
Luminous flux	5138 lm
Fitting efficiency	90 lm/W
Ballast	not included
Energy efficiency class	A+
Dimension	D 1035 mm
Protection degree	IP40
Adjustable	No
Drive-over	No
Walk-over	No
Circular shape	Yes
Oval shape	No
Soft-rotate & slide mechanism	No
Square shape	No

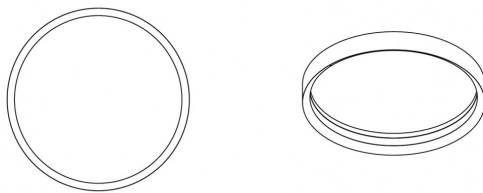

∅
(735-1035-1335)

ACCESSORIES

LB101.9 spot

ELECTRONICS


Dali Ballast

AE75D.24V	75W 24VdcV dali
AE100D.24V	100W 24VdcV dali
AE150D.24VIP	150W 24VdcV dali

On/Off Ballast

AE20.24V	20W 24VdcV
AE25.24VIP	25W 24VdcV
AE30.24VL	30W 24VdcV
AE50.24V	50W 24VdcV
AE60.24VIP	60W 24VdcV
AE75.24V	75W 24VdcV
AE100.2.24V	100W 24 VdcV
AE100.24VIP	100W 24VdcV
AE150.24VIP	150W 24VdcV

LBS perimetral LED

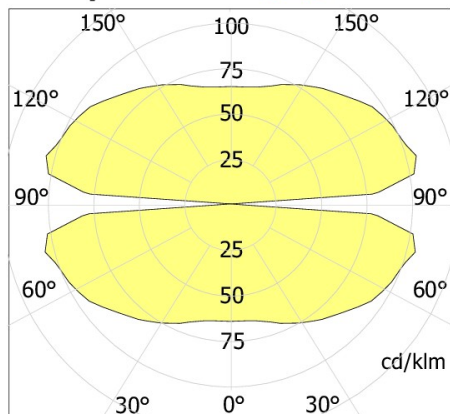

All the dimensions are detailed in millimeters: if not different stated

EN605981 compliant

Ci riserviamo la possibilità di apportare modifiche ai nostri prodotti in qualsiasi momento - We reserve the right to change our products at any time - En tous moment nous reservons le droit de modifier notre produits - Wir behalten uns vor, jederzeit Änderungen an unserem Produkten vorzunehmen - Nos reservamos en todo momento el derecho de realizar cambios en nuestros productos

Lucifero's srl - via del Tappeziere,3 - 40138 Bologna - Italia - ph. +39 051 6014276 - assistenza@luciferos.it - customercare@luciferos.it