




TABAKALERA - CENTRO INTERNACIONAL DE CULTURA
CONTEMPORANEA - SPAIN
LIGHTING PROJECT TAO ILLUMINACION



MINIFILE OPENLIGHT

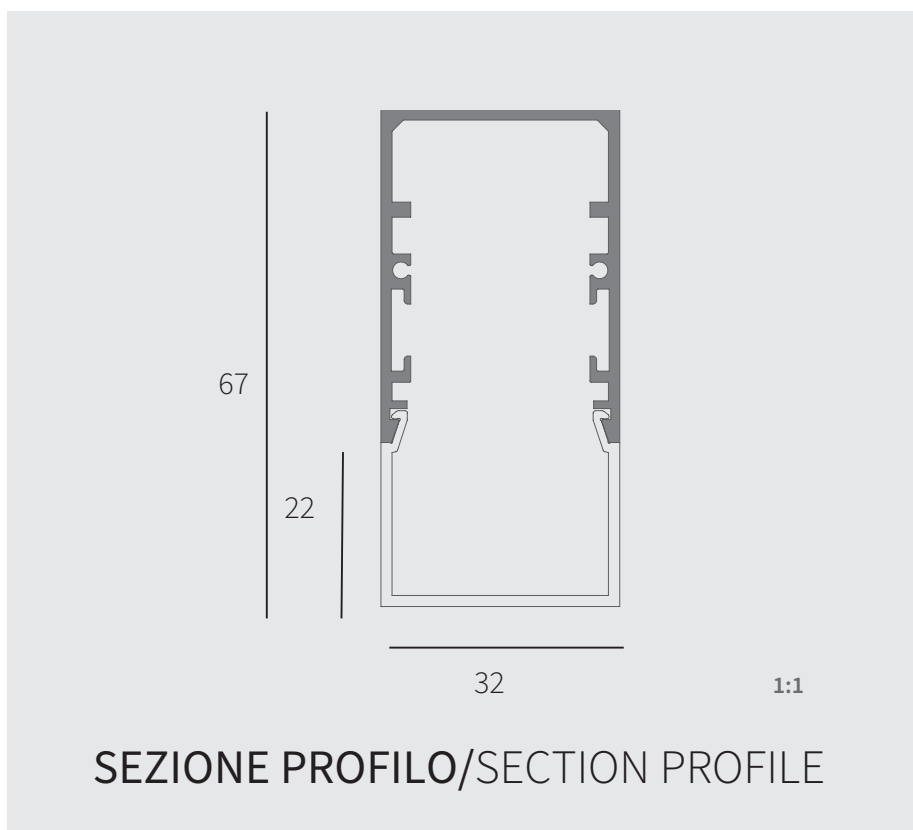

MINIFILE OPENLIGHT

Profili in estruso di alluminio 67x32mm, per installazione a soffitto, a parete, a sospensione, semi-incasso e da binario trifase elettrificato. Sorgenti lineari led ed alimentatori elettronici 230/240V integrati. Finitura verniciata o anodizzata. Schermi diffondenti in policarbonato opalino e testate di chiusura laterali con sistema Light Proof. Grado di protezione IP40/IP43 a seconda delle modalità di installazione. Disponibili in moduli finiti su richiesta e sistema modulare.

Extruded aluminum profiles 67x32mm, for ceiling, wall, suspension, semi-recessed and three-phase electrified track installation. Linear led sources and integrated 230/240V electronic drivers. Painted or anodized finish. Opal polycarbonate diffusing screens and end heads with Light Proof system. IP40 / IP43 depending on the installation method. Available default modules on demand and modular system.



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSTMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



DIFFUSORE OPAL / OPAL DIFFUSER



LINEA LED RGB - RGB WHITE / RGB - RGBW LINEAR LED

FINITURE/FINISHINGS



01-BIANCO/WHITE



02-NERO/BLACK



27-ALLUMINIO ANODIZZATO/
ANODIZED ALUMINIUM

FINITURE PREMIUM /PREMIUM FINISHINGS



81-ORO ROSA/
PINK GOLD



82-BRONZO/
BRONZE



83-OTTONE SATINATO /
BRUSHED BRASS

KELVIN



2700°K




3000°K



4000°K

CURVE FOTOMETRICHE/PHOTOMETRIC DATA





HALF RECESSED

CEILING

WALL MOUNTED

MINIFILE
OPENLIGHT MODULI
DEFAULT



TRACK

SUSPENSION

MINIFILE
OPENLIGHT

FINITI E SISTEMA *MODULE & SYSTEM*



MINIFILE OPENLIGHT

VERSIONI DISPONIBILI/AVAILABLE VERSION

● KELVIN

27 2700K


30 3000K


40 4000K


● DIMMABLE (OPTIONAL)

D Dali Touch & Dimm


/ ## FINITURA/FINISHING


 /01 bianco | white


 /02 nero | black

 /27 alluminio anodizzato | anodized aluminium

/ ## FINITURA PREMIUM /PREMIUM FINISHING

 /81 oro rosa shine/shine pink gold

 /82 bronzo/ bronze

 /83 ottone spazzolato/ brushed brass

COMPOSIZIONE CODICE: xxx.x ●●/##


HOW TO CREATE THE CODE: F1000.827D/01

CODE


F1000.8 ● ● /## — finishing

base code kelvin dimmable


SEMI INCASSO /HALF RECESSED

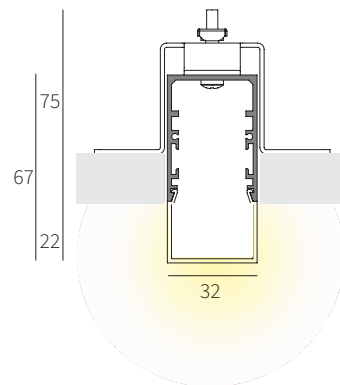

SOFFITTO PARETE /WALL CEILING

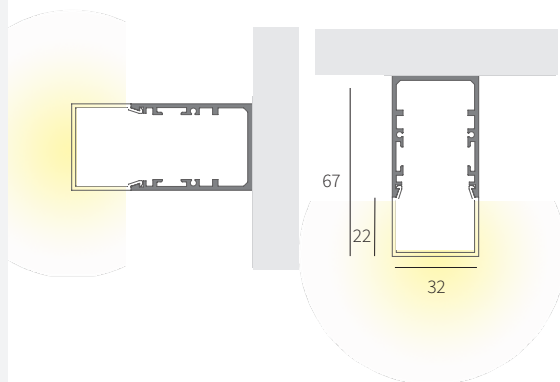


SOSPENSIONE / SUSPENSION

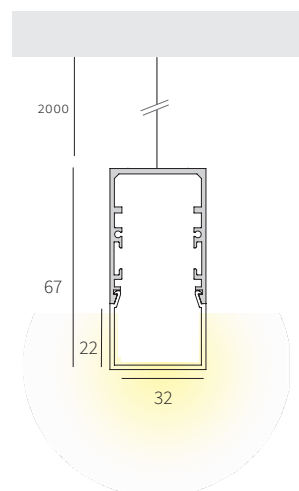

MINIFILE OPENLIGHT SEMI INCASSO HALF RECESSED
PER CARTONGESSO A LUCE DIRETTA E DIFFUSA / FOR FALSE CEILING DIRECT AND DIFFUSED LIGHT




taglio per incasso/ recessed hole dimension 34xL+2

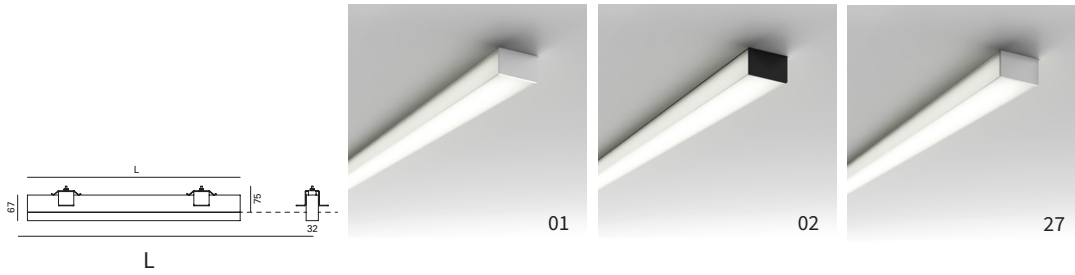


LED	W	L.mm	lm product 3000K	CODE
	12,8	580	1050	MO030.8 ●● /##
	19,2	860	1575	MO031.8 ●● /##
	25,6	1140	2100	MO032.8 ●● /##
	32	1420	2625	MO033.8 ●● /##
	38,4	1700	3150	MO034.8 ●● /##

MINIFILE OPENLIGHT SOFFITTO/PARETE WALL/CEILING
A LUCE DIRETTA E DIFFUSA / DIRECT AND DIFFUSED LIGHT

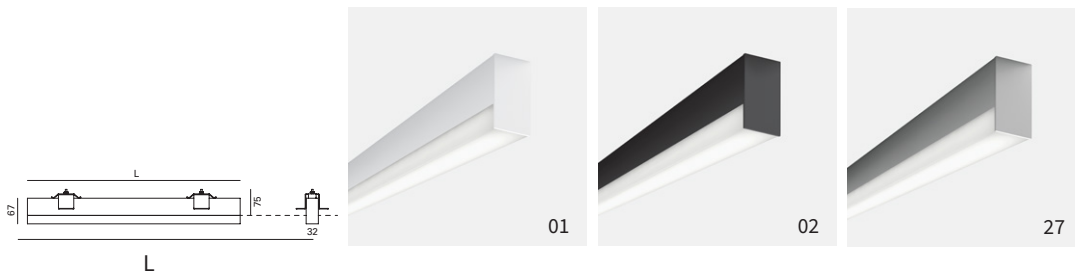


LED	W	L.mm	lm product 3000K	CODE
	12,8	580	1050	MO020.8 ●● /##
	19,2	860	1575	MO021.8 ●● /##
	25,6	1140	2100	MO022.8 ●● /##
	32	1420	2625	MO023.8 ●● /##
	38,4	1700	3150	MO024.8 ●● /##

MINIFILE OPENLIGHT SOSPENSIONE SUSPENSION
A LUCE DIRETTA E DIFFUSA / DIRECT AND DIFFUSED LIGHT

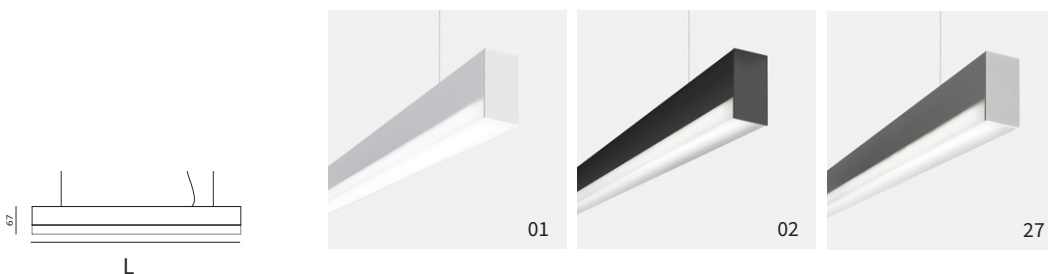

LED	W	L.mm	lm product 3000K	CODE
	12,8	580	1050	MO040.8 ●● /##
	19,2	860	1575	MO041.8 ●● /##
	25,6	1140	2100	MO042.8 ●● /##
	32	1420	2625	MO043.8 ●● /##
	38,4	1700	3150	MO044.8 ●● /##

MINIFILE OPENLIGHT TRACK

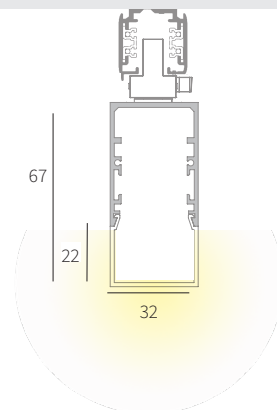

VERSIONI DISPONIBILI/AVAILABLE VERSION

● KELVIN

- 27 2700K
- 30 3000K
- 40 4000K




● DIMMABLE (OPTIONAL)

D Dali Touch & Dimm




SU RICHIESTA ON DEMAND

- E Versione ad emergenza | Emergency version
- D10 Dimmerabile 1-10V | Dimmable 1-10V
- CA Sistema di controllo CASAMBI | CASAMBI control system

/ ## FINITURA/FINISHING

-  /01 bianco | white
-  /02 nero | black
-  /27 alluminio anodizzato | anodized aluminium

/ ## FINITURA PREMIUM /PREMIUM FINISHING

-  /81 oro rosa shine/shine pink gold
-  /82 bronzo/ bronze
-  /83 ottone spazzolato/ brushed brass


COMPOSIZIONE CODICE: xxx.x●●/##

HOW TO CREATE THE CODE: **F1000.827D/01**


CODE

F1000.8 ● ● /## — finishing
 | | |
 base code kelvin dimmable

MINIFILE TRACK
A LUCE DIRETTA E DIFFUSA / DIRECT AND DIFFUSED LIGHT



L

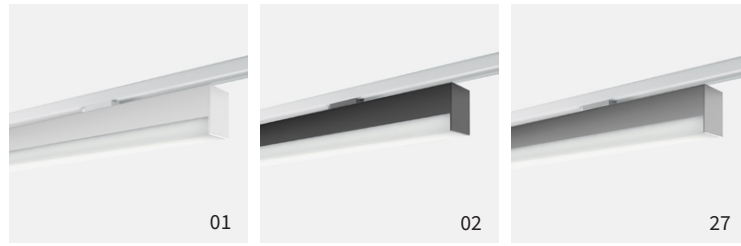


LED

W	L.mm	lm product 3000K	CODE
12,8	580	1050	MO120.8 ●● /##
19,2	860	1575	MO121.8 ●● /##
25,6	1140	2100	MO122.8 ●● /##
32	1420	2625	MO123.8 ●● /##
38,4	1700	3150	MO124.8 ●● /##


ACCESSORI / ACCESSORIES
TRACK SYSTEM

MODULO BINARIO EUROSTANDARD 230V / MODULO BINARIO EUROSTANDARD 230V



L.mm	Kg	CODE
1000	0.92	LT24T.1000 /##
2000	1.83	LT24T.2000 /##
3000	2.75	LT24T.3000 /##


Da completare con gli accessori. Staffa di fissaggio al profilo compresi. | To complete with accessories fixing bracket included



info : Vedi la collezione "Track system". | See "Track System" collection.

MINIFILE OPENLIGHT

SISTEMA SEMI INCASSO
HALF RECESSED SYSTEM



PROFILO VUOTO SEMI INCASSO / HALF RECESSED EMPTY PROFILE

spessore cartongesso / plasterboard thickness



L.mm	CODE
566	MO000.566/##
846	MO000.846/##
1126	MO000.1126/##
1406	MO000.1406/##
1686	MO000.1686/##
3000	MO000.3000/##
---	MO000.misura/##

COPPIA DI TESTATE / COUPLE OF CLOSURE HEADS



CODE
MO005/##

STAFFA SINGOLA DI FISSAGGIO / SINGLE FIXING BRACKET



CODE
MO007

GIUNTI LINEARI COPPIA / LINEAR JOINT COUPLE



CODE
LTM211

COPPIA GIUNTI ANGOLARI / ANGLE CONNECTOR COUPLE



CODE
LTM211.90


DIFFUSORE IN POLICARBONATO OPALINO / OPAL WHITE POLYCARBONATE DIFFUSER



L.mm	CODE
565	MO004.565
845	MO004.845
1125	MO004.1125
1405	MO004.1405
1685	MO004.1685
3000	MO004.3000
---	MO004.misura



ELEMENTI LUMINOSI / LIGHT ELEMENTS P. 215



DRIVERS VEDI | SEE P.447

/## FINITURA/FINISHING


	/01 bianco/white
	/02 nero/black
	/27 alluminio anodizzato /anodized aluminium

/## FINITURA PREMIUM /PREMIUM FINISHING

	/81 oro rosa shine/shine pink gold
	/82 bronzo/bronze
	/83 ottone spazzolato/brushed brass

MINIFILE OPENLIGHT

SISTEMA SOFFITTO / PARETE
WALL CEILING SYSTEM

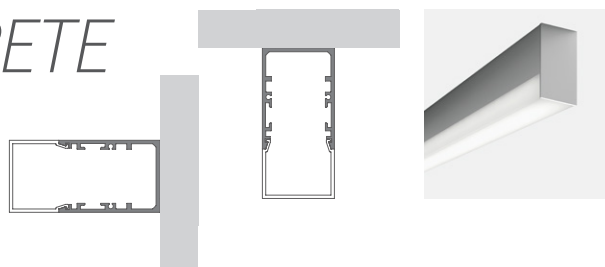

PROFILO VUOTO SOFFITTO-PARETE / WALL-CEILING EMPTY PROFILE



L.mm	CODE
566	MO000.566 /##
846	MO000.846 /##
1126	MO000.1126 /##
1406	MO000.1406 /##
1686	MO000.1686 /##
3000	MO000.3000 /##
---	MO000.misura /##

COPPIA DI TESTATE / COUPLE OF CLOSURE HEADS



CODE
MO005 /##

GIUNTI LINEARI COPPIA / LINEAR JOINT COUPLE



CODE
LTM211

COPPIA GIUNTI ANGOLARI / ANGLE CONNECTOR COUPLE




CODE
LTM211.90

COPPIA GIUNTI ANGOLARI PARETE/SOFFITTO ANGLE CONNECTOR COUPLE WALL/CEILING



CODE
LTM211.90P


DIFFUSORE IN POLICARBONATO OPALINO / OPAL WHITE POLYCARBONATE DIFFUSER



L.mm	CODE
565	MO004.565
845	MO004.845
1125	MO004.1125
1405	MO004.1405
1685	MO004.1685
3000	MO004.3000
---	MO004.misura




ELEMENTI LUMINOSI /LIGHT ELEMENTS P. 215




DRIVERS VEDI | SEE P.447

MINIFILE OPENLIGHT

SISTEMA SOSPENSIONE
SUSPENSION SYSTEM

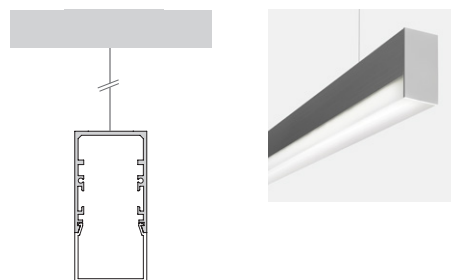

PROFILO VUOTO SOFFITTO-PARETE / WALL-CEILING EMPTY PROFILE




L.mm	CODE
566	MO000.566/##
846	MO000.846 /##
1126	MO000.1126 /##
1406	MO000.1406 /##
1686	MO000.1686 /##
3000	MO000.3000 /##
---	MO000.misura /##

COPPIA DI TESTATE / COUPLE OF CLOSURE HEADS



CODE
MO005 /##

DIFFUSORE IN POLICARBONATO OPALINO / OPAL WHITE POLYCARBONATE DIFFUSER



L.mm	CODE
565	MO004.565
845	MO004.845
1125	MO004.1125
1405	MO004.1405
1685	MO004.1685
3000	MO004.3000
---	MO004.misura

GIUNTI LINEARI COPPIA / LINEAR JOINT COUPLE



CODE
LTM211

COPPIA GIUNTI ANGOLARI / ANGLE CONNECTOR COUPLE



CODE
LTM211.90

COPPIA GIUNTI ANGOLARI PARETE/SOFFITTO ANGLE CONNECTOR COUPLE WALL/CEILING



CODE
LTM211.90P

KIT ALIMENTAZIONE PER SOSPENSIONE / POWER CABLE KIT WITH WHITE CEILING CANOPY



Dim.	L.mm	CODE
3X0,75	2000	LTM048.3/01
4X0,75	2000	LTM048.4/01
5X0,75	2000	LTM048.5/01
7X0,75	2000	LTM048.7/01

Completo di rosone bianco | White ceiling canopy included




KIT CAVI DI SOSPENSIONE IN ACCIAIO L.2000 / STEEL SUSPENSION KIT L.2000






L.mm	CODE
2000	LTM047

Uno ogni 1,5 mt, minimo 2 pezzi | One every 1,5 mt, 2 pieces minimum

/ ## FINITURA/FINISHING

-  /01 bianco/white
-  /02 nero/black
-  /27 alluminio anodizzato / anod.alum

/ ## FINITURA PREMIUM /PREMIUM FINISHING

-  /81 oro rosa shine/shine pink gold
-  /82 bronzo/ bronze
-  /83 ottone spazzolato/ brushed brass

