

CUBOTTI

MINI TRACK

Collezione di apparecchi per un'illuminazione a binario 24V/48V. Apparecchi a luce diretta, disponibili in due versioni per sorgenti a tensione di rete LED con attacco GU10 o G9. Corpo a sezione quadrata in estruso di alluminio in finitura verniciata. Completati di staffa per fissaggio a soffitto o parete a seconda del modello. Grado di protezione IP20 e classe I.

Ceiling or wall mounted luminaires for direct or direct/indirect lighting, for LED mains voltage sources with GU10 or G9 socket. Square section body in extruded aluminum in painted finish. Complete with bracket for ceiling or wall mounting depending on the model. IP20 and class I.

KELVIN

27		2700°K
30		3000°K
35		3500°K
40		4000°K
TW		Tunable White

FASCIO / BEAM

S		SPOT
F		FLOOD
W		WIDE

FINITURE P / P FINISHINGS

/01		BIANCO / WHITE
/02		NERA / BLACK


FINITURE FC / FC FINISHINGS

/01		TELAIO BIANCO OTTICA NERA / WHITE FRAME BLACK OPTIC
/02		TELAIO NERO OTTICA NERA / BLACK FRAME BLACK OPTIC
/41		TELAIO BIANCO OTTICA BIANCA / WHITE FRAME WHITE OPTIC
/42		TELAIO NERO OTTICA ORO / BLACK FRAME GOLD OPTIC

FINITURE PREMIUM / PREMIUM FINISHINGS


		
81-ORO ROSA / PINK GOLD	82-BRONZO ANTICATO / ANTIQUE BRONZE	83-OTTONE SATINATO / BRUSHED BRASS

CURVE FOTOMETRICHE / PHOTOMETRIC DATA

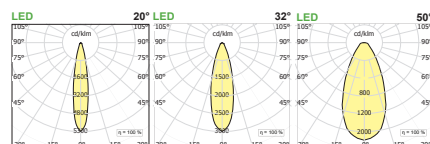

CUBOTTI


CUBOTTI F MINI TRACK INCASSO | RECESSED MINI TRACK

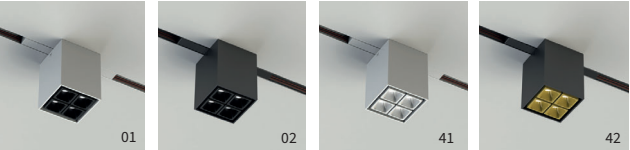

LED 24V e 48V				Im prod./beam 3000K			
W	Dim.	H	Kg	S20°	F32°	W50°	CODE
8,8	70x70	90 + adapter	0,80	800	745	662	CB001.9 ●●●/##

Binario non incluso / mini track not included

CUBOTTI C MINI TRACK SOFFITTO | CEILING MINI TRACK

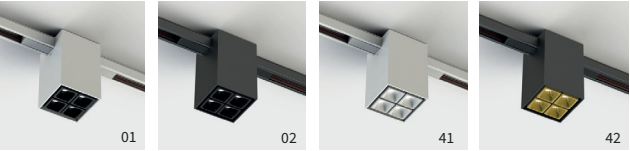

LED 24V e 48V				Im prod./beam 3000K			
W	Dim.	H	Kg	S20°	F32°	W50°	CODE
8,8	70x70	110	0,80	800	745	662	CB002.9 ●●●/##

Binario non incluso / mini track not included

● **KELVIN**

27 2700K

30 3000K

35 3500K

40 4000K

TW Tunable White

● **FASCIO/BEAM**

S Spot 20°

F Flood 32°

W Wide 50°

● **DIMMABLE (OPTIONAL)**

D Dali Touch & Dimm

/ ## **FINITURA/FINISHING**

/01 telaio bianco, ottica nera | white frame, black optic

/02 telaio nero, ottica nera | black frame, black optic

/41 telaio bianco, ottica bianca | white frame, white optic


/42 telaio nero, ottica oro | black frame, gold optic

Per la versione Dali scegliere un alimentatore ON OFF da posizionare remoto (per alimentare il binario).

For Dali version combine a ON OFF power supply to place remotely (for feed the track)

FINITURE PREMIUM DISPONIBILI /PREMIUM FINISHINGS ARE AVAILABLE

CUBOTTI PF MINI TRACK INCASSO | RECESSED MINI TRACK

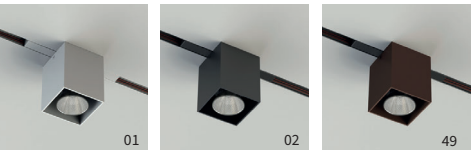

LED				Im product/beam 3000K			
W	mm	Hmm	Kg	F27°	W46°	CODE	
8	70x70	110	0,28	860	860	CB101.9 ●●●/##	
12	70x70	110	0,28	1285	1285		

Binario non incluso / mini track not included

CUBOTTI PC MINI TRACK SOFFITTO | CEILING MINI TRACK



LED				Im product/beam 3000K			
W	mm	Hmm	Kg	F27°	W46°	CODE	
8	70x70	110	0,28	860	860	CB102.9 ●●●/##	
12	70x70	110	0,28	1285	1285		

Binario non incluso / mini track not included

● **KELVIN**

27 2700K

30 3000K

35 3500K

40 4000K

TW Tunable White Dali

● **FASCIO/BEAM**

F Flood 27°

W Wide 46°

/ ## **FINITURA/FINISHING**

/01 bianco/white

/02 nero/black

/49 bronzo / bronze

FINITURE PREMIUM /PREMIUM FINISHINGS

/81 oro rosa/rose gold

/82 bronzo anticato /antique bronze

/83 ottone brunito spazzolato/ brushed burnished brass

DRIVERS VEDI | SEE "ALIMENTATORI" A PAGINA 452

MINITRACK